

STATIONARY TYPE SLOW SPEED
ALTERNATING CURRENT GENERATOR DESIGN

BY
CHARLES FREDERICK SCHARFENSTEIN, JR.

Thesis
527

Library
U. S. Naval Postgraduate School
Annapolis, Md.



STATIONARY TYPE SLOW SPEED
ALTERNATING CURRENT GENERATOR DESIGN

-

C. F. Scharfenstein, Jr.

Thesis
527

STATIONARY TYPE SLOW SPEED
ALTERNATING CURRENT GENERATOR DESIGN

by

Charles Frederick Scharfenstein, Jr.
Lieutenant Commander, United States Coast Guard

Submitted in partial fulfillment
of the requirements
for the degree of
MASTER OF SCIENCE

United States Naval Postgraduate School
Annapolis, Maryland
1950

This work is accepted as fulfilling
the thesis requirements for the degree of

MASTER OF SCIENCE

from the
United States Naval Postgraduate School.

PREFACE

This paper is a treatise upon the elements of the design problem faced when a set of specifications are placed before a designer. It does not attempt to go into elaborate detail as the why and wherefore of each individual step of the design, but rather treats the problem as a general exploration of the more important steps to be reasoned with in the design of a particular machine.

The general procedure followed is one which covers first, what the designer confronts, what the specifications require, what the results of his calculations are, the investigation of some of the more fundamental theories behind the reasoning, the general requirements of a regulation and field excitation system for the specification, and finally, a general over-all physical picture of the end result. The basic calculations appear in the appendix of this paper.

Obviously, much information has been drawn from the literature dealing with the subject, for which credit is given as the paper develops. The author is also indebted to these professors of the Electrical Department of the Naval Post-graduate School: Professors C. V. O. Terwilliger, W. C. Smith, and E. E. Vivell.

C. F. SCHARFENSTEIN, JR.,
Lieutenant Commander,
United States Coast Guard,

1950.

TABLE OF CONTENTS

Certificate of approval	<u>Page No.</u> i
Preface	ii
List of Illustrations	iv
Symbols and Abbreviations	v - vi
CHAPTER	
I - INTRODUCTION - THE BASIC DESIGN PROBLEM	1
II - THE SPECIFICATIONS	8
III - THE ELEMENTS OF THE FINISHED MACHINE	11
IV - THE FUNDAMENTAL PRINCIPLES	16
V - MAGNETIC CIRCUITRY - WINDINGS - VENTILATION - OTHER CONCEPTS	24
VI - THE REGULATION AND FIELD EXCITATION	40
Appendix - The Calculations	43
Bibliography	78

LIST OF ILLUSTRATIONS

<u>Figure No.</u>	<u>Title</u>	<u>Page No.</u>
1	Winding Diagram, Schematic	22
2	Saturation Curve for Cast Steel	25
3	Saturation Curve for Forged Steel	26
4	Saturation Curve for Laminated Silicon Steel	28
5	Saturation Curves for Pole Iron	29
6	Slot Section	50
7	Machine Section Showing Magnetic Circuit	53
8	Magnetization Curve	54
9	Vector Diagrams of Voltages and Ampere Turns	57
10	Field Pole Profiles, Arrangement of Field Coils	59
11	Efficiency, Line Amperes, and Terminal Volts vs. Output Loading	61
12	Wire Enamel Thickness Curves	64
13	Friction and Windage Losses Curves	68
14	Terminal Volts per Phase versus Output Loadings	69
15 & 16	Winding Connections, Stator and Field, and Machine Profiles with Name Plate Data and Spares	76,77

SYMBOLS AND ABBREVIATIONS

SYMBOLS

\rightarrow	-	Vector Voltage.
$\rightarrow\rhd$	-	Vector Amperes.
$\rightarrow\odot$	-	Vector Flux, or Vector Ampere-turns.
Δ	-	Peripheral current density.
%	-	Percentum.
Φ	-	Flux density, or flux.
/	-	Typist slant bar - ratio, - or dividing symbol.
@	-	Measured at.

ABBREVIATIONS

A	-	Area of cross section
AIEE	-	American Institute of Electrical Engineers
ASA	-	American Standards Association.
ASTM	-	American Society of Testing Materials.
AT	-	Ampere turns, (NI)
AWG	-	American Wire Gage
B	-	Magnetic flux density, gaussess or lines per sq cm.
CFM	-	Cubic feet per minute
circ.	-	circular (mil)
cm.	-	centimeter
cps	-	cycles per second
DC	-	Direct current
DCC	-	Double cotton covered
D ² L	-	Armature diameter ² x armature length
ea.	-	each, or per
F	-	Force, or Field

THE HISTORY OF THE

1780

1. The first year of the year 1780	1
2. The second year of the year 1780	2
3. The third year of the year 1780	3
4. The fourth year of the year 1780	4
5. The fifth year of the year 1780	5
6. The sixth year of the year 1780	6
7. The seventh year of the year 1780	7
8. The eighth year of the year 1780	8
9. The ninth year of the year 1780	9
10. The tenth year of the year 1780	10

1781

1. The first year of the year 1781	1
2. The second year of the year 1781	2
3. The third year of the year 1781	3
4. The fourth year of the year 1781	4
5. The fifth year of the year 1781	5
6. The sixth year of the year 1781	6
7. The seventh year of the year 1781	7
8. The eighth year of the year 1781	8
9. The ninth year of the year 1781	9
10. The tenth year of the year 1781	10
11. The eleventh year of the year 1781	11
12. The twelfth year of the year 1781	12
13. The thirteenth year of the year 1781	13
14. The fourteenth year of the year 1781	14
15. The fifteenth year of the year 1781	15
16. The sixteenth year of the year 1781	16
17. The seventeenth year of the year 1781	17
18. The eighteenth year of the year 1781	18
19. The nineteenth year of the year 1781	19
20. The twentieth year of the year 1781	20

SYMBOLS AND ABBREVIATIONS
(Cont.)

ABBREVIATIONS (Continued)

fpm	- Feet per minute
fps	- Feet per second
HP	- Horsepower
I	- Current, amperes
ins.	- Inches
JPI	- Joint (Army-Navy-Air Force) Packing Instructions.
KVA	- Kilovolt-amperes
KW	- Kilowatts
l	- length, armature, inches, pole, etc., sometimes written \mathcal{L}
lbs.	- Mass or force, pounds
max.	- maximum
mmf	- magnetomotive force
NEMA	- National Electrical Manufacturers Association.
NL	- No load
°C.	- Degrees, Centigrade scale
°F.	- Degrees, Fahrenheit scale
PF	- Power factor
psi	- pounds per sq. inch
R	- Resistance
RPM	- Revolutions per minute
SAE	- Society of Automotive Engineers
SC	- Short circuit
SCR	- Short circuit rating, regulation
X	- Reactance

Table of Contents

Table of Contents

Introduction	1
Chapter 1	10
Chapter 2	20
Chapter 3	30
Chapter 4	40
Chapter 5	50
Chapter 6	60
Chapter 7	70
Chapter 8	80
Chapter 9	90
Chapter 10	100
Chapter 11	110
Chapter 12	120
Chapter 13	130
Chapter 14	140
Chapter 15	150
Chapter 16	160
Chapter 17	170
Chapter 18	180
Chapter 19	190
Chapter 20	200
Chapter 21	210
Chapter 22	220
Chapter 23	230
Chapter 24	240
Chapter 25	250
Chapter 26	260
Chapter 27	270
Chapter 28	280
Chapter 29	290
Chapter 30	300
Chapter 31	310
Chapter 32	320
Chapter 33	330
Chapter 34	340
Chapter 35	350
Chapter 36	360
Chapter 37	370
Chapter 38	380
Chapter 39	390
Chapter 40	400
Chapter 41	410
Chapter 42	420
Chapter 43	430
Chapter 44	440
Chapter 45	450
Chapter 46	460
Chapter 47	470
Chapter 48	480
Chapter 49	490
Chapter 50	500
Chapter 51	510
Chapter 52	520
Chapter 53	530
Chapter 54	540
Chapter 55	550
Chapter 56	560
Chapter 57	570
Chapter 58	580
Chapter 59	590
Chapter 60	600
Chapter 61	610
Chapter 62	620
Chapter 63	630
Chapter 64	640
Chapter 65	650
Chapter 66	660
Chapter 67	670
Chapter 68	680
Chapter 69	690
Chapter 70	700
Chapter 71	710
Chapter 72	720
Chapter 73	730
Chapter 74	740
Chapter 75	750
Chapter 76	760
Chapter 77	770
Chapter 78	780
Chapter 79	790
Chapter 80	800
Chapter 81	810
Chapter 82	820
Chapter 83	830
Chapter 84	840
Chapter 85	850
Chapter 86	860
Chapter 87	870
Chapter 88	880
Chapter 89	890
Chapter 90	900
Chapter 91	910
Chapter 92	920
Chapter 93	930
Chapter 94	940
Chapter 95	950
Chapter 96	960
Chapter 97	970
Chapter 98	980
Chapter 99	990
Chapter 100	1000

I - INTRODUCTION - THE BASIC DESIGN PROBLEM

The basic design problem facing the electrical machinery designer follows along these general lines. He is faced with the questions of HOW?, WHERE?, WHAT?, WHEN? and WHY? He aligns the problem along these bounds. We shall present it here in the form of three questions with outlined answers to avoid a lengthy dissertation readily available to all designers in any number of good basic texts. This is our outline:

1. WHAT does the designer start with?

(1) Size of Load - HP, or KW, and PF

- a. Normal loads - Overloads

(2) Permissible Temperature Rise

- a. Armature - field winding - mechanical parts
- b. How measured in each case?

(3) Speed - RPM

- a. Normal speed - overload speeds.

(4) Type of Construction.

- a. Degree of enclosure - open - drip proof - splash proof - explosion proof - totally enclosed.
- b. Method of ventilation - self - blowers - hydrogen.
- c. Method of cooling - heat exchangers - room exhaust.
- d. Arrangement of bearings.
- e. Connection to other machinery - type of coupling belts - chain drive - flange sizes.

CHAPTER I. THE DISCOVERY OF AMERICA	1
CHAPTER II. THE FIRST SETTLEMENTS	15
CHAPTER III. THE GROWTH OF THE COLONIES	35
CHAPTER IV. THE STRUGGLE FOR INDEPENDENCE	55
CHAPTER V. THE CONSTITUTION	75
CHAPTER VI. THE UNION UNDER THE ARTICLES OF CONFEDERATION	95
CHAPTER VII. THE UNION UNDER THE CONSTITUTION	115
CHAPTER VIII. THE UNION UNDER THE ARTICLES OF CONFEDERATION	135
CHAPTER IX. THE UNION UNDER THE CONSTITUTION	155
CHAPTER X. THE UNION UNDER THE ARTICLES OF CONFEDERATION	175
CHAPTER XI. THE UNION UNDER THE CONSTITUTION	195
CHAPTER XII. THE UNION UNDER THE ARTICLES OF CONFEDERATION	215
CHAPTER XIII. THE UNION UNDER THE CONSTITUTION	235
CHAPTER XIV. THE UNION UNDER THE ARTICLES OF CONFEDERATION	255
CHAPTER XV. THE UNION UNDER THE CONSTITUTION	275
CHAPTER XVI. THE UNION UNDER THE ARTICLES OF CONFEDERATION	295
CHAPTER XVII. THE UNION UNDER THE CONSTITUTION	315
CHAPTER XVIII. THE UNION UNDER THE ARTICLES OF CONFEDERATION	335
CHAPTER XIX. THE UNION UNDER THE CONSTITUTION	355
CHAPTER XX. THE UNION UNDER THE ARTICLES OF CONFEDERATION	375
CHAPTER XXI. THE UNION UNDER THE CONSTITUTION	395
CHAPTER XXII. THE UNION UNDER THE ARTICLES OF CONFEDERATION	415
CHAPTER XXIII. THE UNION UNDER THE CONSTITUTION	435
CHAPTER XXIV. THE UNION UNDER THE ARTICLES OF CONFEDERATION	455
CHAPTER XXV. THE UNION UNDER THE CONSTITUTION	475
CHAPTER XXVI. THE UNION UNDER THE ARTICLES OF CONFEDERATION	495
CHAPTER XXVII. THE UNION UNDER THE CONSTITUTION	515
CHAPTER XXVIII. THE UNION UNDER THE ARTICLES OF CONFEDERATION	535
CHAPTER XXIX. THE UNION UNDER THE CONSTITUTION	555
CHAPTER XXX. THE UNION UNDER THE ARTICLES OF CONFEDERATION	575
CHAPTER XXXI. THE UNION UNDER THE CONSTITUTION	595
CHAPTER XXXII. THE UNION UNDER THE ARTICLES OF CONFEDERATION	615
CHAPTER XXXIII. THE UNION UNDER THE CONSTITUTION	635
CHAPTER XXXIV. THE UNION UNDER THE ARTICLES OF CONFEDERATION	655
CHAPTER XXXV. THE UNION UNDER THE CONSTITUTION	675
CHAPTER XXXVI. THE UNION UNDER THE ARTICLES OF CONFEDERATION	695
CHAPTER XXXVII. THE UNION UNDER THE CONSTITUTION	715
CHAPTER XXXVIII. THE UNION UNDER THE ARTICLES OF CONFEDERATION	735
CHAPTER XXXIX. THE UNION UNDER THE CONSTITUTION	755
CHAPTER XL. THE UNION UNDER THE ARTICLES OF CONFEDERATION	775
CHAPTER XLI. THE UNION UNDER THE CONSTITUTION	795
CHAPTER XLII. THE UNION UNDER THE ARTICLES OF CONFEDERATION	815
CHAPTER XLIII. THE UNION UNDER THE CONSTITUTION	835
CHAPTER XLIV. THE UNION UNDER THE ARTICLES OF CONFEDERATION	855
CHAPTER XLV. THE UNION UNDER THE CONSTITUTION	875
CHAPTER XLVI. THE UNION UNDER THE ARTICLES OF CONFEDERATION	895
CHAPTER XLVII. THE UNION UNDER THE CONSTITUTION	915
CHAPTER XLVIII. THE UNION UNDER THE ARTICLES OF CONFEDERATION	935
CHAPTER XLIX. THE UNION UNDER THE CONSTITUTION	955
CHAPTER L. THE UNION UNDER THE ARTICLES OF CONFEDERATION	975
CHAPTER LI. THE UNION UNDER THE CONSTITUTION	995

- f. General arrangement - dimension limitations - weight limitations - horizontal mounting - no athwart ship mounting aboard ship.

(5) Requirements of Loads

- a. Voltage - under and over - wave shape desired
- b. Power factor
- c. Efficiency
- d. Torques
- e. Current - inrush motors
- f. Stability - Short Circuit Rating - reactance requirements.
- g. Regulation - limits
- h. Inertia - spring constant
- i. Reactive KVA - line charging
- j. Noise
- k. Radio and telephone interference

(6) Available Excitation

- a. Source - bus - DC exciter - separate driven exciter - electronic - static.

(7) Standards

- a. Company handbook and published data.
- b. A.S.A.
- c. NEMA
- d. AIEE
- e. ASTM
- f. Customer
- g. Government

1. Introduction	1
2. Theoretical background	2
3. Methodology	3
4. Results	4
5. Discussion	5
6. Conclusion	6
7. References	7
8. Appendix	8
9. Bibliography	9
10. Index	10
11. Glossary	11
12. Acknowledgements	12
13. Declaration of interest	13
14. Funding	14
15. Author contributions	15
16. Ethics approval	16
17. Data availability	17
18. Competing interests	18
19. Additional information	19
20. Correspondence	20
21. Publisher's note	21
22. Supplementary Information	22
23. References	23
24. Index	24
25. Glossary	25
26. Acknowledgements	26
27. Declaration of interest	27
28. Funding	28
29. Author contributions	29
30. Ethics approval	30
31. Data availability	31
32. Competing interests	32
33. Additional information	33
34. Correspondence	34
35. Publisher's note	35
36. Supplementary Information	36
37. References	37
38. Index	38
39. Glossary	39
40. Acknowledgements	40
41. Declaration of interest	41
42. Funding	42
43. Author contributions	43
44. Ethics approval	44
45. Data availability	45
46. Competing interests	46
47. Additional information	47
48. Correspondence	48
49. Publisher's note	49
50. Supplementary Information	50
51. References	51
52. Index	52
53. Glossary	53
54. Acknowledgements	54
55. Declaration of interest	55
56. Funding	56
57. Author contributions	57
58. Ethics approval	58
59. Data availability	59
60. Competing interests	60
61. Additional information	61
62. Correspondence	62
63. Publisher's note	63
64. Supplementary Information	64
65. References	65
66. Index	66
67. Glossary	67
68. Acknowledgements	68
69. Declaration of interest	69
70. Funding	70
71. Author contributions	71
72. Ethics approval	72
73. Data availability	73
74. Competing interests	74
75. Additional information	75
76. Correspondence	76
77. Publisher's note	77
78. Supplementary Information	78
79. References	79
80. Index	80
81. Glossary	81
82. Acknowledgements	82
83. Declaration of interest	83
84. Funding	84
85. Author contributions	85
86. Ethics approval	86
87. Data availability	87
88. Competing interests	88
89. Additional information	89
90. Correspondence	90
91. Publisher's note	91
92. Supplementary Information	92
93. References	93
94. Index	94
95. Glossary	95
96. Acknowledgements	96
97. Declaration of interest	97
98. Funding	98
99. Author contributions	99
100. Ethics approval	100
101. Data availability	101
102. Competing interests	102
103. Additional information	103
104. Correspondence	104
105. Publisher's note	105
106. Supplementary Information	106
107. References	107
108. Index	108
109. Glossary	109
110. Acknowledgements	110
111. Declaration of interest	111
112. Funding	112
113. Author contributions	113
114. Ethics approval	114
115. Data availability	115
116. Competing interests	116
117. Additional information	117
118. Correspondence	118
119. Publisher's note	119
120. Supplementary Information	120
121. References	121
122. Index	122
123. Glossary	123
124. Acknowledgements	124
125. Declaration of interest	125
126. Funding	126
127. Author contributions	127
128. Ethics approval	128
129. Data availability	129
130. Competing interests	130
131. Additional information	131
132. Correspondence	132
133. Publisher's note	133
134. Supplementary Information	134
135. References	135
136. Index	136
137. Glossary	137
138. Acknowledgements	138
139. Declaration of interest	139
140. Funding	140
141. Author contributions	141
142. Ethics approval	142
143. Data availability	143
144. Competing interests	144
145. Additional information	145
146. Correspondence	146
147. Publisher's note	147
148. Supplementary Information	148
149. References	149
150. Index	150
151. Glossary	151
152. Acknowledgements	152
153. Declaration of interest	153
154. Funding	154
155. Author contributions	155
156. Ethics approval	156
157. Data availability	157
158. Competing interests	158
159. Additional information	159
160. Correspondence	160
161. Publisher's note	161
162. Supplementary Information	162
163. References	163
164. Index	164
165. Glossary	165
166. Acknowledgements	166
167. Declaration of interest	167
168. Funding	168
169. Author contributions	169
170. Ethics approval	170
171. Data availability	171
172. Competing interests	172
173. Additional information	173
174. Correspondence	174
175. Publisher's note	175
176. Supplementary Information	176
177. References	177
178. Index	178
179. Glossary	179
180. Acknowledgements	180
181. Declaration of interest	181
182. Funding	182
183. Author contributions	183
184. Ethics approval	184
185. Data availability	185
186. Competing interests	186
187. Additional information	187
188. Correspondence	188
189. Publisher's note	189
190. Supplementary Information	190
191. References	191
192. Index	192
193. Glossary	193
194. Acknowledgements	194
195. Declaration of interest	195
196. Funding	196
197. Author contributions	197
198. Ethics approval	198
199. Data availability	199
200. Competing interests	200
201. Additional information	201
202. Correspondence	202
203. Publisher's note	203
204. Supplementary Information	204
205. References	205
206. Index	206
207. Glossary	207
208. Acknowledgements	208
209. Declaration of interest	209
210. Funding	210
211. Author contributions	211
212. Ethics approval	212
213. Data availability	213
214. Competing interests	214
215. Additional information	215
216. Correspondence	216
217. Publisher's note	217
218. Supplementary Information	218
219. References	219
220. Index	220
221. Glossary	221
222. Acknowledgements	222
223. Declaration of interest	223
224. Funding	224
225. Author contributions	225
226. Ethics approval	226
227. Data availability	227
228. Competing interests	228
229. Additional information	229
230. Correspondence	230
231. Publisher's note	231
232. Supplementary Information	232
233. References	233
234. Index	234
235. Glossary	235
236. Acknowledgements	236
237. Declaration of interest	237
238. Funding	238
239. Author contributions	239
240. Ethics approval	240
241. Data availability	241
242. Competing interests	242
243. Additional information	243
244. Correspondence	244
245. Publisher's note	245
246. Supplementary Information	246
247. References	247
248. Index	248
249. Glossary	249
250. Acknowledgements	250
251. Declaration of interest	251
252. Funding	252
253. Author contributions	253
254. Ethics approval	254
255. Data availability	255
256. Competing interests	256
257. Additional information	257
258. Correspondence	258
259. Publisher's note	259
260. Supplementary Information	260
261. References	261
262. Index	262
263. Glossary	263
264. Acknowledgements	264
265. Declaration of interest	265
266. Funding	266
267. Author contributions	267
268. Ethics approval	268
269. Data availability	269
270. Competing interests	270
271. Additional information	271
272. Correspondence	272
273. Publisher's note	273
274. Supplementary Information	274
275. References	275
276. Index	276
277. Glossary	277
278. Acknowledgements	278
279. Declaration of interest	279
280. Funding	280
281. Author contributions	281
282. Ethics approval	282
283. Data availability	283
284. Competing interests	284
285. Additional information	285
286. Correspondence	286
287. Publisher's note	287
288. Supplementary Information	288
289. References	289
290. Index	290
291. Glossary	291
292. Acknowledgements	292
293. Declaration of interest	293
294. Funding	294
295. Author contributions	295
296. Ethics approval	296
297. Data availability	297
298. Competing interests	298
299. Additional information	299
300. Correspondence	300
301. Publisher's note	301
302. Supplementary Information	302
303. References	303
304. Index	304
305. Glossary	305
306. Acknowledgements	306
307. Declaration of interest	307
308. Funding	308
309. Author contributions	309
310. Ethics approval	310
311. Data availability	311
312. Competing interests	312
313. Additional information	313
314. Correspondence	314
315. Publisher's note	315
316. Supplementary Information	316
317. References	317
318. Index	318
319. Glossary	319
320. Acknowledgements	320
321. Declaration of interest	321
322. Funding	322
323. Author contributions	323
324. Ethics approval	324
325. Data availability	325
326. Competing interests	326
327. Additional information	327
328. Correspondence	328
329. Publisher's note	329
330. Supplementary Information	330
331. References	331
332. Index	332
333. Glossary	333
334. Acknowledgements	334
335. Declaration of interest	335
336. Funding	336
337. Author contributions	337
338. Ethics approval	338
339. Data availability	339
340. Competing interests	340
341. Additional information	341
342. Correspondence	342
343. Publisher's note	343
344. Supplementary Information	344
345. References	345
346. Index	346
347. Glossary	347
348. Acknowledgements	348
349. Declaration of interest	349
350. Funding	350
351. Author contributions	351
352. Ethics approval	352
353. Data availability	353
354. Competing interests	354
355. Additional information	355
356. Correspondence	356
357. Publisher's note	357
358. Supplementary Information	358
359. References	359
360. Index	360
361. Glossary	361
362. Acknowledgements	362
363. Declaration of interest	363
364. Funding	364
365. Author contributions	365
366. Ethics approval	366
367. Data availability	367
368. Competing interests	368
369. Additional information	369
370. Correspondence	370
371. Publisher's note	371
372. Supplementary Information	372
373. References	373
374. Index	374
375. Glossary	375
376. Acknowledgements	376
377. Declaration of interest	377
378. Funding	378
379. Author contributions	379
380. Ethics approval	380
381. Data availability	381
382. Competing interests	382
383. Additional information	383
384. Correspondence	384
385. Publisher's note	385
386. Supplementary Information	386
387. References	387
388. Index	388
389. Glossary	389
390. Acknowledgements	390
391. Declaration of interest	391
392. Funding	392
393. Author contributions	393
394. Ethics approval	394
395. Data availability	395
396. Competing interests	396
397. Additional information	397
398. Correspondence	398
399. Publisher's note	399
400. Supplementary Information	400
401. References	401
402. Index	402
403. Glossary	403
404. Acknowledgements	404
405. Declaration of interest	405
406. Funding	406
407. Author contributions	407
408. Ethics approval	408
409. Data availability	409
410. Competing interests	410
411. Additional information	411
412. Correspondence	412
413. Publisher's note	413
414. Supplementary Information	414
415. References	415
416. Index	416
417. Glossary	417
418. Acknowledgements	418
419. Declaration of interest	419
420. Funding	420
421. Author contributions	421
422. Ethics approval	422
423. Data availability	423
424. Competing interests	424
425. Additional information	425
426. Correspondence	426
427. Publisher's note	427
428. Supplementary Information	428
429. References	429
430. Index	430
431. Glossary	431
432. Acknowledgements	432
433. Declaration of interest	433
434. Funding	434
435. Author contributions	435
436. Ethics approval	436
437. Data availability	437
438. Competing interests	438
439. Additional information	439
440. Correspondence	440
441. Publisher's note	441
442. Supplementary Information	442
443. References	443
444. Index	444
445. Glossary	445
446. Acknowledgements	446
447. Declaration of interest	447
448. Funding	448

(8) Performance and Inspection

- a. Maritime Commission
- b. Navy Department - BuShips
- c. Army Engineers
- d. Army - Navy - Air Force

2. WHAT are the machine limitations?

(1) Regardless of application or design all machines are limited by certain physical laws which in turn arise from materials in the machine. These materials and their limiting criteria are:

- a. Iron - flux limitations.
- b. Copper - current carrying limitations.
- c. Insulation - voltage limitations.
- d. Steel - mechanical support problems.
- e. Ventilating fluid - temperature rise limits.

(2) Mechanical Limitations

- a. Centrifugal forces acting on rims, field poles.
- b. Load torque acting on driver.
- c. Magnetic forces acting on conductors and iron.
- d. Critical speeds in high velocity machines.
- e. External shock - gyroscopic action.

(3) Thermal Limitations

- a. Insulation - Class A - 105 degrees Centigrade
 - Class B - 125 degrees Centigrade
 - Class H - 180 degrees Centigrade
 - Class C - No limit - silicones
- b. Ventilation - free - forced - liquid.

1. Introduction	1
2. Theoretical Framework	2
3. Methodology	3
4. Results	4
5. Discussion	5
6. Conclusion	6
7. References	7
8. Appendix	8
9. Bibliography	9
10. Index	10
11. Glossary	11
12. Acknowledgments	12
13. Author's Note	13
14. Declaration of Interest	14
15. Funding	15
16. Data Availability	16
17. Ethics Approval	17
18. Informed Consent	18
19. Author Contributions	19
20. Correspondence	20
21. Additional Information	21
22. Supplementary Material	22
23. References	23
24. Appendix	24
25. Bibliography	25
26. Index	26
27. Glossary	27
28. Acknowledgments	28
29. Author's Note	29
30. Declaration of Interest	30
31. Funding	31
32. Data Availability	32
33. Ethics Approval	33
34. Informed Consent	34
35. Author Contributions	35
36. Correspondence	36
37. Additional Information	37
38. Supplementary Material	38
39. References	39
40. Appendix	40
41. Bibliography	41
42. Index	42
43. Glossary	43
44. Acknowledgments	44
45. Author's Note	45
46. Declaration of Interest	46
47. Funding	47
48. Data Availability	48
49. Ethics Approval	49
50. Informed Consent	50
51. Author Contributions	51
52. Correspondence	52
53. Additional Information	53
54. Supplementary Material	54
55. References	55
56. Appendix	56
57. Bibliography	57
58. Index	58
59. Glossary	59
60. Acknowledgments	60
61. Author's Note	61
62. Declaration of Interest	62
63. Funding	63
64. Data Availability	64
65. Ethics Approval	65
66. Informed Consent	66
67. Author Contributions	67
68. Correspondence	68
69. Additional Information	69
70. Supplementary Material	70
71. References	71
72. Appendix	72
73. Bibliography	73
74. Index	74
75. Glossary	75
76. Acknowledgments	76
77. Author's Note	77
78. Declaration of Interest	78
79. Funding	79
80. Data Availability	80
81. Ethics Approval	81
82. Informed Consent	82
83. Author Contributions	83
84. Correspondence	84
85. Additional Information	85
86. Supplementary Material	86
87. References	87
88. Appendix	88
89. Bibliography	89
90. Index	90
91. Glossary	91
92. Acknowledgments	92
93. Author's Note	93
94. Declaration of Interest	94
95. Funding	95
96. Data Availability	96
97. Ethics Approval	97
98. Informed Consent	98
99. Author Contributions	99
100. Correspondence	100
101. Additional Information	101
102. Supplementary Material	102
103. References	103
104. Appendix	104
105. Bibliography	105
106. Index	106
107. Glossary	107
108. Acknowledgments	108
109. Author's Note	109
110. Declaration of Interest	110
111. Funding	111
112. Data Availability	112
113. Ethics Approval	113
114. Informed Consent	114
115. Author Contributions	115
116. Correspondence	116
117. Additional Information	117
118. Supplementary Material	118
119. References	119
120. Appendix	120
121. Bibliography	121
122. Index	122
123. Glossary	123
124. Acknowledgments	124
125. Author's Note	125
126. Declaration of Interest	126
127. Funding	127
128. Data Availability	128
129. Ethics Approval	129
130. Informed Consent	130
131. Author Contributions	131
132. Correspondence	132
133. Additional Information	133
134. Supplementary Material	134
135. References	135
136. Appendix	136
137. Bibliography	137
138. Index	138
139. Glossary	139
140. Acknowledgments	140
141. Author's Note	141
142. Declaration of Interest	142
143. Funding	143
144. Data Availability	144
145. Ethics Approval	145
146. Informed Consent	146
147. Author Contributions	147
148. Correspondence	148
149. Additional Information	149
150. Supplementary Material	150
151. References	151
152. Appendix	152
153. Bibliography	153
154. Index	154
155. Glossary	155
156. Acknowledgments	156
157. Author's Note	157
158. Declaration of Interest	158
159. Funding	159
160. Data Availability	160
161. Ethics Approval	161
162. Informed Consent	162
163. Author Contributions	163
164. Correspondence	164
165. Additional Information	165
166. Supplementary Material	166
167. References	167
168. Appendix	168
169. Bibliography	169
170. Index	170
171. Glossary	171
172. Acknowledgments	172
173. Author's Note	173
174. Declaration of Interest	174
175. Funding	175
176. Data Availability	176
177. Ethics Approval	177
178. Informed Consent	178
179. Author Contributions	179
180. Correspondence	180
181. Additional Information	181
182. Supplementary Material	182
183. References	183
184. Appendix	184
185. Bibliography	185
186. Index	186
187. Glossary	187
188. Acknowledgments	188
189. Author's Note	189
190. Declaration of Interest	190
191. Funding	191
192. Data Availability	192
193. Ethics Approval	193
194. Informed Consent	194
195. Author Contributions	195
196. Correspondence	196
197. Additional Information	197
198. Supplementary Material	198
199. References	199
200. Appendix	200
201. Bibliography	201
202. Index	202
203. Glossary	203
204. Acknowledgments	204
205. Author's Note	205
206. Declaration of Interest	206
207. Funding	207
208. Data Availability	208
209. Ethics Approval	209
210. Informed Consent	210
211. Author Contributions	211
212. Correspondence	212
213. Additional Information	213
214. Supplementary Material	214
215. References	215
216. Appendix	216
217. Bibliography	217
218. Index	218
219. Glossary	219
220. Acknowledgments	220
221. Author's Note	221
222. Declaration of Interest	222
223. Funding	223
224. Data Availability	224
225. Ethics Approval	225
226. Informed Consent	226
227. Author Contributions	227
228. Correspondence	228
229. Additional Information	229
230. Supplementary Material	230
231. References	231
232. Appendix	232
233. Bibliography	233
234. Index	234
235. Glossary	235
236. Acknowledgments	236
237. Author's Note	237
238. Declaration of Interest	238
239. Funding	239
240. Data Availability	240
241. Ethics Approval	241
242. Informed Consent	242
243. Author Contributions	243
244. Correspondence	244
245. Additional Information	245
246. Supplementary Material	246
247. References	247
248. Appendix	248
249. Bibliography	249
250. Index	250
251. Glossary	251
252. Acknowledgments	252
253. Author's Note	253
254. Declaration of Interest	254
255. Funding	255
256. Data Availability	256
257. Ethics Approval	257
258. Informed Consent	258
259. Author Contributions	259
260. Correspondence	260
261. Additional Information	261
262. Supplementary Material	262
263. References	263
264. Appendix	264
265. Bibliography	265
266. Index	266
267. Glossary	267
268. Acknowledgments	268
269. Author's Note	269
270. Declaration of Interest	270
271. Funding	271
272. Data Availability	272
273. Ethics Approval	273
274. Informed Consent	274
275. Author Contributions	275
276. Correspondence	276
277. Additional Information	277
278. Supplementary Material	278
279. References	279
280. Appendix	280
281. Bibliography	281
282. Index	282
283. Glossary	283
284. Acknowledgments	284
285. Author's Note	285
286. Declaration of Interest	286
287. Funding	287
288. Data Availability	288
289. Ethics Approval	289
290. Informed Consent	290
291. Author Contributions	291
292. Correspondence	292
293. Additional Information	293
294. Supplementary Material	294
295. References	295
296. Appendix	296
297. Bibliography	297
298. Index	298
299. Glossary	299
300. Acknowledgments	300
301. Author's Note	301
302. Declaration of Interest	302
303. Funding	303
304. Data Availability	304
305. Ethics Approval	305
306. Informed Consent	306
307. Author Contributions	307
308. Correspondence	308
309. Additional Information	309
310. Supplementary Material	310
311. References	311
312. Appendix	312
313. Bibliography	313
314. Index	314
315. Glossary	315
316. Acknowledgments	316
317. Author's Note	317
318. Declaration of Interest	318
319. Funding	319
320. Data Availability	320
321. Ethics Approval	321
322. Informed Consent	322
323. Author Contributions	323
324. Correspondence	324
325. Additional Information	325
326. Supplementary Material	326
327. References	327
328. Appendix	328
329. Bibliography	329
330. Index	330
331. Glossary	331
332. Acknowledgments	332
333. Author's Note	333
334. Declaration of Interest	334
335. Funding	335
336. Data Availability	336
337. Ethics Approval	337
338. Informed Consent	338
339. Author Contributions	339
340. Correspondence	340
341. Additional Information	341
342. Supplementary Material	342
343. References	343
344. Appendix	344
345. Bibliography	345
346. Index	346
347. Glossary	347
348. Acknowledgments	348
349. Author's Note	349
350. Declaration of Interest	350
351. Funding	351
352. Data Availability	352
353. Ethics Approval	353
354. Informed Consent	354
355. Author Contributions	355
356. Correspondence	356
357. Additional Information	357
358. Supplementary Material	358
359. References	359
360. Appendix	360
361. Bibliography	361
362. Index	362
363. Glossary	363
364. Acknowledgments	364
365. Author's Note	365
366. Declaration of Interest	366
367. Funding	367
368. Data Availability	368
369. Ethics Approval	369
370. Informed Consent	370
371. Author Contributions	371
372. Correspondence	372
373. Additional Information	373
374. Supplementary Material	374
375. References	375
376. Appendix	376
377. Bibliography	377
378. Index	378
379. Glossary	379
380. Acknowledgments	380
381. Author's Note	381
382. Declaration of Interest	382
383. Funding	383
384. Data Availability	384
385. Ethics Approval	385
386. Informed Consent	386
387. Author Contributions	387
388. Correspondence	388
389. Additional Information	389
390. Supplementary Material	390
391. References	391
392. Appendix	392
393. Bibliography	393
394. Index	394
395. Glossary	395
396. Acknowledgments	396
397. Author's Note	397
398. Declaration of Interest	398
399. Funding	399
400. Data Availability	400
401. Ethics Approval	401
402. Informed Consent	402
403. Author Contributions	403
404. Correspondence	404
405. Additional Information	405
406. Supplementary Material	406
407. References	407
408. Appendix	408
409. Bibliography	409
410. Index	410
411. Glossary	411
412. Acknowledgments	412
413. Author's Note	413
414. Declaration of Interest	414
415. Funding	415
416. Data Availability	416
417. Ethics Approval	417
418. Informed Consent	418
419. Author Contributions	419
420. Correspondence	420
421. Additional Information	421
422. Supplementary Material	422
423. References	423
424. Appendix	424
425. Bibliography	425
426. Index	426
427. Glossary	427
428. Acknowledgments	428
429. Author's Note	429
430. Declaration of Interest	430
431. Funding	431
432. Data Availability	432
433. Ethics Approval	433
434. Informed Consent	434
435. Author Contributions	435
436. Correspondence	436
437. Additional Information	437
438. Supplementary Material	438
439. References	439
440. Appendix	440
441. Bibliography	441
442. Index	442
443. Glossary	443
444. Acknowledgments	444
445. Author's Note	445
446. Declaration of Interest	446
447. Funding	447
448. Data Availability	448
449. Ethics Approval	449

- c. Losses - 100 CFM per KW for an 18°C. air temperature rise.

(4) Electrical and Magnetic limitations.

- a. Ability to carry current not limited except in heating. Current density varies from 1500 amperes per inch squared to 4000 amp/in².
- b. Flux - saturation - 120,000 lines/in.² or 18,000 gauss.
- c. Armature current loading limits - Δ
 Δ = amperes per sq. in. of armature periphery.
= 1200 for Class A insulation.
= 1800 for Class B insulation.
- d. Average air gap density, magnetic, 28 to 30 kilo lines per inch².

(5) Performance Limitations.

- a. Maximum output generator.
1.0 PF - 150%; 0.80 PF - 200%
Increased by - increasing field mmf, by increasing air gap, or by field heating.
- b. Generator regulation.
Standard generator - 50°C. rise - 40%
- 40°C. rise - 25%
Increased in same manner as above.
- c. Efficiency and heating.
High temperature machine - low efficiency.
Thermal coefficient of copper.
High flux densities - customary densities shown at top of next page.

<u>Magnetic path</u>	<u>60 cps</u>	<u>25cps</u>
armature core	50,000-90,000	80,000-110,000
armature teeth, ave.	80,000-100,000	90,000-110,000
armature teeth, max.	115,000	120,000
air gap	30,000-50,000	30,000-50,000
*pole body	90,000-110,000	90,000-110,000
*spider, max.	120,000	120,000

* dependent upon choice of material.

d. Voltage limitations.

Space factor.

Heating.

Optimum for rating.

Secondary effect of increased X_l , or X_l'

e. Power Factor.

<u>PF</u>	<u>KVA/D²L</u>	<u>PF</u>	<u>KVA/D²L</u>
1.00	1.000	0.80	0.845
0.90	0.890	0.70	0.803

f. Starting and synchronizing torques.

Three machines in one - induction motor - with three types of rotors - reluctance and synchronous.

g. Torsional vibration.

$WK^2 = P_r =$ torsional rigidity

h. Noise limitations as per specifications

i. Radio and telephonic interference.

3. WHERE does the designer start his design and HOW?

(1) Review of past designs.

(2) Existing tools.

(3) Development of new tools.

(4) Justification of expense.

(5) Types of construction.

a. Armature punchings.

b. Armature coil - drum - nested - multiple turn - bar - taped turns - half back - inverted turns.

c. Rotor poles - solid - bolted - dove tail - lip -

d. Field winding - wire - pole and form wound - strip.

(6) Procedure in design depends upon the individual and starting point, but usually

a. Assume punching diameter and length.

b. Determine armature coil from Area and Φ

c. Check flux capacity.

d. Check armature coil heating.

e. Check SCR

f. Calculate excitation.

g. Design field coil and check field heating.

(7) Efficiencies.

a. Calculate reactances.

b. Calculate starting performance.

c. Check mechanical limitations.

d. Check criticals - lateral and torsional - stresses in pole roots, flywheel rim.

e. Layout mechanical structure.

f. Check mechanical stresses.

g. Make alternate designs.

h. Choose optimum design from all compared.

Thus, the basic design problem resolves into three ideas: - What are the starting conditions? - What are the electrical and physical limitations? - Where does the designer start his design and how?

We came upon our thesis subject while visiting the Coast Guard Yard at Curtis Bay, Maryland. At that time there was undergoing tests an unattended lightship power plant consisting of three self-excited, diesel driven, slow speed, generator sets, to be remotely controlled. This brought to the writer's attention that there was a feasible way besides exciter excitation to supply field power to a generator. To design one such machine became my thesis subject. This paper is part of my effort towards this end.

II - THE SPECIFICATIONS

The specification upon which our machine is based is, in part, as follows. I quote from U.S. Coast Guard Civil Engineering Division Specification 4-B-5 for Stationary Type, Slow Speed, Heavy Duty, Diesel-Engine-Driven Generator Sets, dated August, 1949:

At this writing, 1 May 1950, the contract has been let in this instance, and delivery of the sets as required will be made sometime during the winter of 1950-1951.

1. Scope: - This contract will include the furnishing of eight (8) heavy-duty, slow-speed diesel engine driven generators complete with all accessories and spare parts as specified herein. These engine generators will be installed two to a group with all accessories and one switchboard in Coast Guard Loran Stations located in the Western Pacific areas.....

2. General: - The intent of these specifications is to obtain four groups of machinery. Each group will consist of: two slow-speed, air starting, 3-phase, 240-volt, 60-cycle, diesel engine driven generators of not less than 93.8 KVA at 80% power factor; a complete switchboard; instruction books,...and special means of excitation and voltage regulation for each generator, all complete with spares as.....

3. Engines: - The diesel engines shall be vertical. designed for continuous service, direct-connected to alternating current generators. The rotative speed shall be not less than 360 nor more than 450 synchronous revolutions per minute (RPM). They shall be capable of starting cold within a temperature range of 20 to 75 degrees Fahrenheit.....

9. Critic Speeds: - Each diesel engine with its direct connected alternating current generator shall be engineered and designed as a complete unit and is to be free from all harmful critical and torsional vibration within the operating range of speed and capacity.....

11. Generator: - The electric generators shall be direct connected to the diesel engines and shall deliver three phase, three wire, 60 cycle, 240-volt alternating current voltage at rated engine speed. The generators shall have a continuous duty rating of not less than 93.75 KVA at 80% power factor. They shall be of a recognized standard make and shall be built in accordance

AMERICAN MEDICAL ASSOCIATION
 PUBLISHED WEEKLY
 CHICAGO, ILL., U.S.A.
 Vol. 10, No. 1, January 1917
 Price, Five Cents

CONTENTS
 Original Articles
 The Medical Profession and the Public
 The Medical Profession and the Public
 The Medical Profession and the Public

Editorial
 The Medical Profession and the Public
 The Medical Profession and the Public
 The Medical Profession and the Public

Correspondence
 The Medical Profession and the Public
 The Medical Profession and the Public
 The Medical Profession and the Public

Obituary
 The Medical Profession and the Public
 The Medical Profession and the Public
 The Medical Profession and the Public

Announcements
 The Medical Profession and the Public
 The Medical Profession and the Public
 The Medical Profession and the Public

Index
 The Medical Profession and the Public
 The Medical Profession and the Public
 The Medical Profession and the Public

Subscription Information
 The Medical Profession and the Public
 The Medical Profession and the Public
 The Medical Profession and the Public

Advertising Information
 The Medical Profession and the Public
 The Medical Profession and the Public
 The Medical Profession and the Public

with the latest standards of the AIEE and NEMA. The generators shall be capable of delivering electrical energy continuously at their full KVA rating without exceeding a temperature rise of 60 degrees Centigrade in the stator of the field windings for Class A insulation in an ambient temperature of 40 degrees Centigrade, when measured by the rise in resistance or by imbedded detectors. Generators shall have low reactance field circuits capable of fast response to field current changes.

(a) Excitation: - Main field static excitation is required. No restriction exists as to method other than as specified herein. Electronic devices will not be acceptable if their failure will result in loss of excitation. The equipment and method used must be reliable and guaranteed by the manufacturer.

(b) Voltage regulation: - Steady state voltage regulation as defined by the A.S.A., shall not be more than 3% at rated power factor. Short time voltage dips or surges due to any change in the alternating current line current (not to exceed 100% rated current) and reactance of generator field and characteristics of automatic voltage regulator shall not exceed 10% plus or minus, and shall have decayed to steady state in not more than one-half second. Better performance is desired and will be evaluated..... The voltage regulation equipment must be completely static, and may be incorporated in the excitation equipment. Electronic devices will not be accepted if their failure will result in the loss of excitation. The voltage regulation equipment shall be furnished with means for manual adjustment of voltage. Cross connections between the voltage regulation equipment will be permitted for parallel operation of generators.

(c) Parallel operation: - The governors, generators, excitation and voltage regulation equipment shall be designed and guaranteed for satisfactory parallel operation of two generators under any load condition. Semi-automatic paralleling by manual closure of oncoming generator breaker with delayed field excitation is required. Provision shall be made on each generator panel for momentary excitation to permit adjustments of speed and voltage prior to paralleling. Under conditions of parallel operation each generator shall carry (within 5%) one-half the total load on the system.

(d) Phase Unbalance: - Under a condition of single phase load of 15% of rated amperes at any power factor between rated and unity and with no other load on the generator, the var-

iation in voltage between phases shall not exceed 5% of rated voltage.

(e) Short Circuit: - Generators shall be capable of withstanding without injury to any part, a three-phase short circuit at the terminals for a period of two minutes with constant field excitation. The generator shall also be capable of withstanding a single-phase short circuit between any two terminals for a period of two minutes with constant field excitation.


(f) Protection Against Corrosion: - In order to prevent deterioration due to corrosion, all bolts, studs, pins, springs, screws, cap screws, and other such fastenings or fittings, shall be of a satisfactory corrosion-resistant material or of a material treated in a satisfactory manner to render it adequately resistant to corrosion.

(g) Audio Noises: - Generators shall operate without objectionable audio noise at all loads and speeds within the service range.

(h) Insulation Resistance: - The insulation resistance of the generator stator and field windings, when corrected to 25°C., shall be not less than 25 megohms if Class A insulation is used and not less than 50 megohms if Class B insulation is used. Correction for temperature shall be made on the basis of insulation resistance doubling for each 15°C. decrease in temperature. This test shall be made on the completed generator and it shall be made before the dielectric strength test is made.

18. Packing and Shipping: - Upon acceptance, all equipment and parts subject to damage by salt water or rainfall shall be prepared and packed for overseas shipment in accordance with JPI-14A. This applies particularly to electrical items.....The engines and generators shall be disassembled and packed in the smallest practicable shipping units; packages shall not exceed 5000 pounds gross weight.

The specifications read thus. We shall now proceed with the design calculations and show next the results electrically of these calculations.

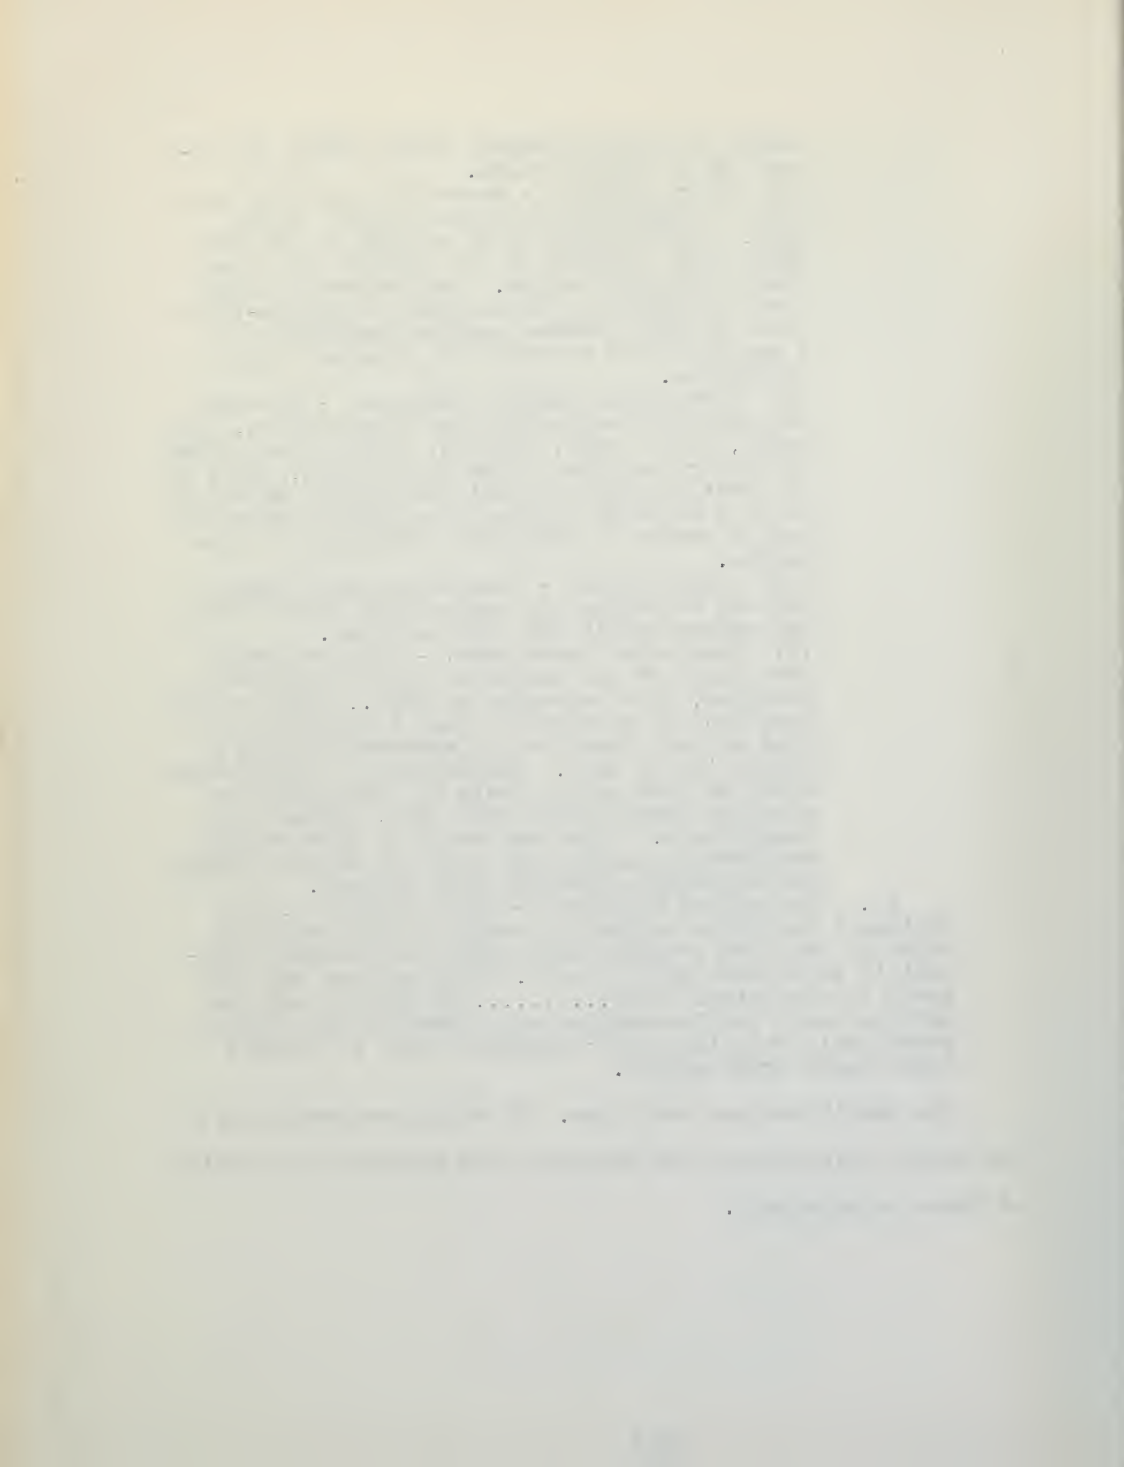

III - THE ELEMENTS OF THE FINISHED MACHINE

This Chapter is best expressed as a tabulated presentation of the results of the calculations of Appendix A, there being only descriptive terms and numerical values of interest to the planning section of the manufacturer in these figures. This table, upon being sent to the estimators and planners of a manufacturer, will be scrutinized and made to fit a similar design of the company unless there is an altogether new idea in the design. Certain patent rights and uses come into the picture at this point, and there can be no infringement by the one company upon the patent rights of another. All ideas, we are advised, are fair game for the thesis investigator of a Naval or other Government school, in that the United States Government has free access to the patents of all concerned when such an investigation is being made. If the designer were to put his design into the open market for competitive purposes with those of other designers, then by law he must conform to those patent rights to which he has access, and must not infringe upon the rights of others.

The tabled results are as follows:

Salient pole machine design sheet.

Armature - (stator)

Bore punchings		- 0.014 ins.
Core width		- 4.7 ins.
Air ducts, No. and width	One	- 0.5 ins.
Depth below slots		- 4.0 ins.

Frame yoke bore -	- 42.5 ins.
Segments, - (quadrants) -	90 degree
Type winding - lap - 5/6ths pitch - 6 ϕ inside - series	
Chord factor -	0.833
Throw -	4.22 ins.
Conductors per slot -	4 ea.
Total conductors -	480 ea.
Size conductors -	0.185 x 0.956 ins.
Current density -	1145 amperes per inch squared
Total flux - ϕ	716,541 lines
Section air gap -	22.2 inches squared per hole
Gap density -	32245 lines/inch squared
Leakage constant (accounted for) -	1.175 to 1.18
Flux per pole -	38,000 lines/inch squared
Tooth pitch -	0.79 ins.
Tooth density -	118,000 lines per inch squared
Core density -	23,700 lines per inch squared
Weight volume of teeth - 420 cubic inches -	118 lbs.
Weight volume of core - 1830 cubic inches -	512 lbs.
Grade of iron - 2.3 Si. -	0.014 inches thick
Loss in teeth -	1065 watts
Loss in core -	300 watts
P.F., Damper, and End losses -	340 watts
Total Iron losses -	1705 watts
One-half mean turn -	4.7 ins.
Ventilation -	natural
Resistance per phase @ 75°C. -	0.008 ohms

Armature I^2R loss @ 75°C. -	1205 watts
Field - (Rotor)(Salient Pole)	
Total air gap at center of field pole -	0.25 ins.
Diameter of rotor at center line of field pole -	29.65 ins.
Peripheral speed -	47.343 f.p.s. - 2840 f.p.m.
Pole pitch -	4.65 ins.
Section pole -	1.5 x 3.0 ins. - 4.5 inches square
Pole density -	38,000 lines per square inch
Spider section -	1.0 x 4.56 ins. - 4.56 square inch section.
Spider density -	75,000 lines per inch squared - forged steel
Type spider -	forged steel fabricated by welding.
Damper slot pitch -	0.375 ins.
Damper bars -	No. 10 A.W.G. - round - 0.102 ins. diameter
Damper end ring - continuous - copper -	0.25 x 0.25 at 29 inch diameter
Effective air gap -	0.25 ins.
Turns per pole -	240
Size copper -	No. 13 A.W.G.
Size copper -	0.084 inch diameter D.C.C.
Mean turn length -	11.4 ins.
Surface area -	76.0 sq.ins.

C - OVERALL PICTURE

K.V.A. -	93.75
P.F. -	0.80 lagging
Amps -	10.5 field amperes
Resistance -	0.505 ohms at 60°C.
IR -	5.6 volts
I^2R -	55 watts

Sq. Inches per watt -

1.38



Excitation Capacity Calculated - 5 volts, 10 amperes per pole

Weight of armature copper -

300 lbs.

Weight of field copper -

150 lbs.

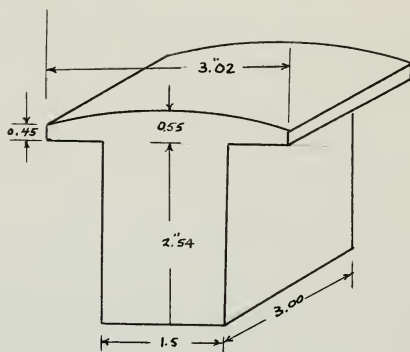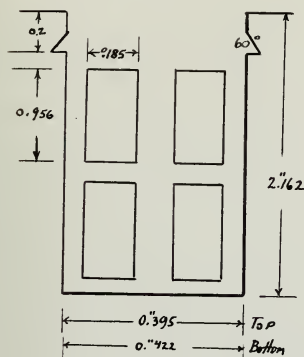

Efficiency at full load - 93.0% at PF 0.80 lagging.

load	25%	50%	75%	100%	125%
Armature I	56.40	112.75	169.15	225.50	281.90
Field I	10.50	10.50	10.50	10.50	10.50
Field volts	100.00	100.00	100.00	100.00	100.00
F & W losses	1500				
Core losses	1696				
Arma. I^2R	80.00	320.00	715.00	1275.00	1990.00
Field Loss (120 x 10.5)	1260				
Total losses	4540.00	4680.00	5095.00	5655.00	6370.00
Efficiency	81.00	89.00	91.80	93.00	93.75%

Summary of results:

93.75 KVA @ 0.80 PF - 240 volts - 225.5 amps - 3 phase -

60 cps - 360 RPM - 20 poles - salient field poles design -

natural ventilation with 48 degree rise - 60 degree rise allowable as per the specification. The machine at this point, appears to be contained in an area 43" diameter, 9" long axially.



IV - THE FUNDAMENTAL PRINCIPLES

The problem constantly before the designer is how to build the machine which will economically fulfill the specification. To meet the specifications, it is well for the designer to recall that there are certain matters which are common to all generators, motors and convertors, magnetic circuitry, electric circuitry, insulation, ventilation, and the framework of his machine. These certain matters are in the nature of formulae and details of shop practices.

All dynamo-electric machines depend upon the same fundamental facts for their operation: - firstly, the fact that when a conductor is moved across a magnetic field there is generated in it an electromotive force; and secondly, the fact that when an electric current flows in a conductor which itself is in a magnetic field, the conductor is subject to a mechanical force. The questions then arise, therefore, along the following lines: How much magnetic field do we require? How much motion? How much voltage to be generated? How much current? How much force? How to keep heat losses to a minimum? It must not be supposed that the rules enumerated in the reference volumes must be followed to the letter in each instance of design, for if such were to be the case, each designer would in his life span be capable of putting into the hands of his construction personnel but three or four sets of electrical plans. A busy designer would never get through his work if he stopped to calculate everything. He judiciously guesses a good deal of the time, makes rapid estimating calcu-

lations of quantities he has not time to calculate. However, he is not justified in so estimating unless he knows the limit of his possible error with fair accuracy, and knows that with the error he will still have a machine which will comply with its specification. Knowledge of these things can only come from many calculations made and many machines tested. The way to acquire the art of intelligent estimation is to employ fairly simple rules for calculation that are based on sound principles.

Thus for our machine, we shall have to outline the procedure to follow in the problem of producing a machine to meet the specification. We shall have the benefit of all the prior work done in calculating the various performances, both magnetically and mechanically, of the available metals to use in the various parts of the machine. We shall have the background gained by years of experience in the field of those designers and professors who have seen fit to produce their efforts to paper for the benefit of others. We shall not be infringing upon wholly unknown ground when we go into various references for verifications of our estimates and assumptions. We shall follow along the paths of those who before us have had faced the same type of problem.

To establish the overall picture let us examine just what we face. The majority of alternating-current generators are built with a revolving field consisting of a circular rim, to which are attached definite pole pieces projecting outward radially, each pole piece having its own exciting winding in the form of a coil surrounding the body of the pole piece.

The revolving field is surrounded peripherally by the stationary armature, or stator, which carries the armature winding in slots. This is the type in which we are interested. The single phase generator is usually about 30% heavier and more costly than a polyphase generator of the same rating. However by changing the internal armature connections, a polyphase machine may be frequently reconnected to be a three-, two-, or single-phase machine. Transmission costs control the phase ratings of most power machines, and they are most commonly three-phase in character. Two-phase and three-phase generators of the same capacity are practically the same dimension, weight, and cost.

For years there were attempts made to develop a satisfactory and simple self-excited alternator. German patents as early as the latter part of the last century devised and explained systems involving electric conversion of output voltages and current to produce self-excitation. Precedence of English and Swedish competition in the construction field gave little encouragement to this idea. During the 1930-1940 decade the increasing usefulness of the mechanical selenium rectifier gave rise to a more sound reason for the re-emergence of the self-excited machines. German patents, though, stifled development in the United States, until the early 1940's, when just as the last war broke out, renewed interest for alternator simplification reopened the excitation and inherent regulation plans. The perfection of the automatic voltage regulator along with metallic thyatron tubes for

converted power purposes aided the development of this renewed trend. Combining rigid self-regulation with self-excitation is the problem we face with our specifications, and we shall discuss our system in Chapter VII.

Excitation must of necessity, if a machine is a separately excited installation, be from a standardized 125 or 250 volts, D.C. bus. There may be one exciter, (the direct current generator supplying the field excitation voltage), for several alternators, or there may be an individual exciter for each alternator, and the individual exciter may be on the same shaft with the prime mover and alternator.

All alternators are rated in kilovolt-amperes, and unless otherwise specifically stated, are rated at that KVA which they will give continuously without a rise in temperature exceeding certain insulation-limit predetermined values.

Inorganic insulating materials allow a temperature rise greater than organic materials such as cotton, impregnated cotton, and varnish impregnated materials. The latter are used in the armatures of most slow- and moderate-speed machines.

Most machines have their fields designed sufficiently liberally to enable them to give their rated power at 80 per cent power factor with rated voltage. This is the case of our specification, also. The heating of the armature depends upon the KVA load, not the KW load, for the KVA load expresses the actual rated volts and amperes which cause the heat losses. The lower the power factor of the inductive load

connected to the alternator, the greater the heating of the field coils for the same KVA output. This can best be seen by a cursory inspection of the vector diagram which shows no-load and terminal volts, along with the flux representations which indicate the ampere turns required of the field coils to produce the required flux in the alternator in producing its rated output at the lower power factor loadings.

The principal parts of the alternator are:

(1) The stator frame, which is usually of cast or forged steel in a box or hollow form. It is the mechanical structure of the machine serving to support the stator. It is usually made hollow and thus aids in directing the ventilating air.

(2) The stator core is the ring of laminated steel with slots on its inner race for the armature copper conductors. The core is usually made up of sheets of 0.014 inch steel, punched in sectors of a circle with the joints staggered as these laminations are piled up in layers.

(3) The armature winding may be single-phase, two-phase, or three-phase, externally. The latter is most common, while the added arrangement of making the winding what is termed six-phases-inside, that is, arranged to give three sets of paired windings under the influence of the revolving generating field flux, is sometimes employed to derive a greater output with the same amount of copper. This is gained because the correction factor for the conductor spacing with relation to each other is greater for the six-phase-inside case and therefore there is the gain desired. The winding

consists of form-wound coils placed in slots and connected up in accordance with the Figures 1 and 15. The coils are insulated with varnish, varnished cambric, cotton or linen, and taped for mechanical binding. Ours are going to be varnished, and we shall use pressboard for separating the copper from the steel laminations themselves.

(4) The field poles are usually laminated steel punched 0.025 to 0.075 inches thick with flaring poles shoes. They are usually of rectangular cross-section and bolted to the rim, thus holding the field coil in place. The pole face is beveled, chamfered, or otherwise machined to give the flux wave the desired shape.

(5) The field coils consist of many turns of wire, or copper ribbon wound on edge, with insulation between turns. All spools are connected in series and designed so that the specified exciter voltage will give the required field current plus a slight margin for emergencies.

(6) The field yoke is either cast or forged steel, whichever suits the economy of the design, and is in the form of a rectangularly sectioned ring or rim of reasonable magnetic qualities, as it forms the yoke of each magnetic circuit. It must have ample strength to stand the centrifugal force of carrying the poles revolving at the rated r.p.m.

(7) Collector rings, of which two are required, are placed on the shaft and are required to carry the excitation current to the revolving field coils. Metal graphite brushes resting on the rings form the connecting link.

Three phase - six phases inside - 120 slots - 4 conductors/slot
2 conductors per coil - 20 poles - 6 slots per pole - 120 slots
five-sixths pitch

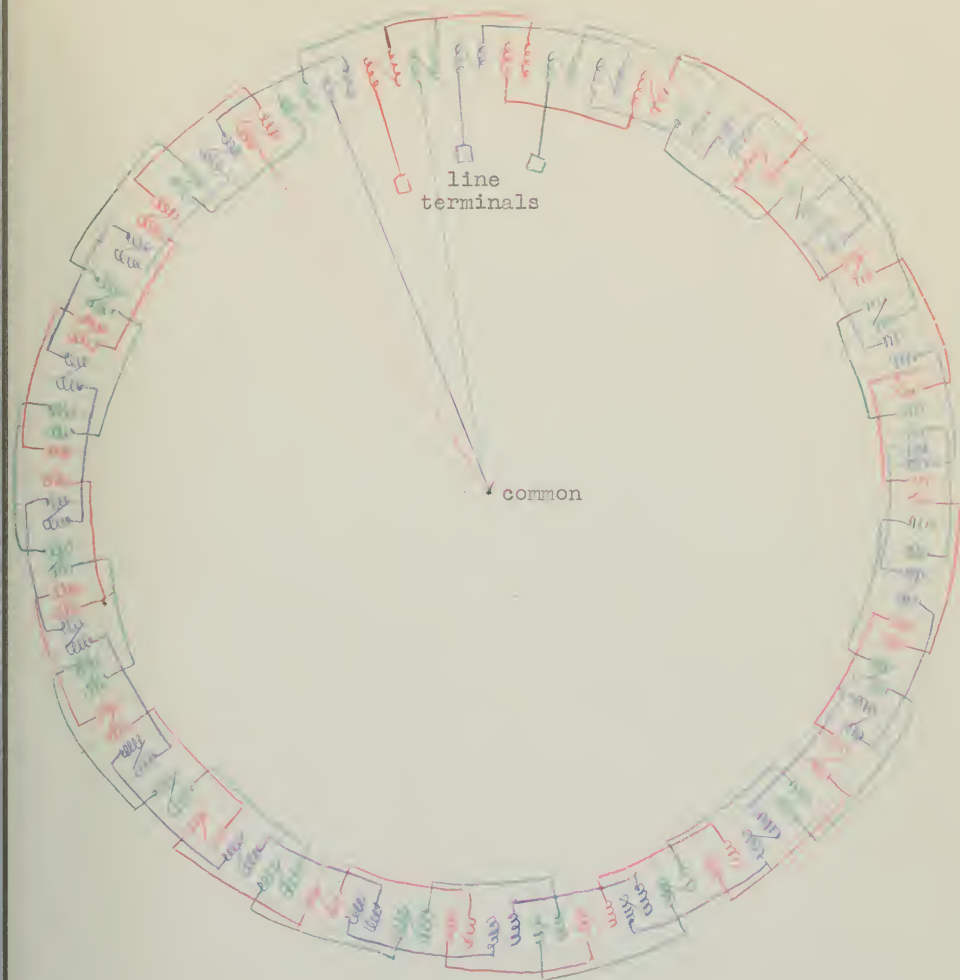


Figure 1

(8) The spider, shaft, bearings, pedestal, and bed-plate are the usual mechanical accessories required for the completion of the assembly.


Thus we have the general picture of what we are striving to design. We shall now proceed with a short relation of the principles behind the circuitry and calculations.

V - MAGNETIC CIRCUITRY - WINDINGS - VENTILATION

1. The Magnetic Circuit

The magnetic circuit includes the field yoke, field poles, pole shoes, air gap, armature laminations, slot copper, and armature yoke. For each of these parts, (except the air gap), it is necessary to choose materials that have suitable magnetic properties. The various materials have properties as follows: Cast steel, which we shall use in the spider of the field yoke, has a saturation curve, for a representative grade of present day available steel, as found in Figure 2. For mechanical purposes it may be operated at a tensile stress up to 16,000 p.s.i. Its weight is figured on the basis of 0.28 pounds per cubic inch. In the spider of high speed revolving field alternators, the metal has to withstand the centrifugal force, and therefore the mechanical stresses must be as carefully investigated as are the magnetic conditions.

Forged steel we shall use in the revolving field pole structure base ring. It has excellent mechanical properties, although in our case where it is to be welded together after forming of the rim, the welded section must be heat-treated to above the austenitic range in order to stress relieve the faults resulting from the welding. Forged steel has very good magnetic permeability. The magnetic properties of a typical grade of forged steel are shown in Figure 3. The maximum working stress is 16,000 p.s.i. This is very important as the proportioning of the revolving structure to withstand

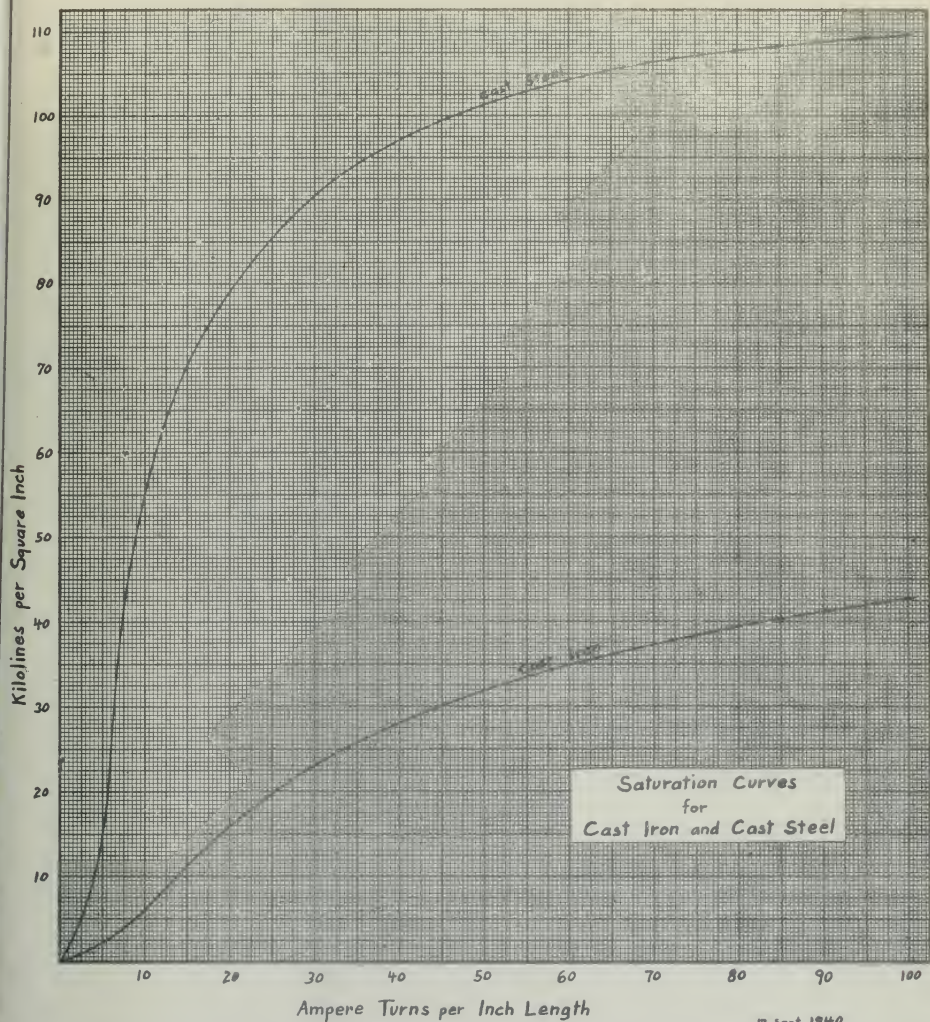

Saturation Curves
for
Cast Iron and Cast Steel


Figure 2

13 Sept. 1940

cvt


RP 27

Ampere Turns per Inch Length

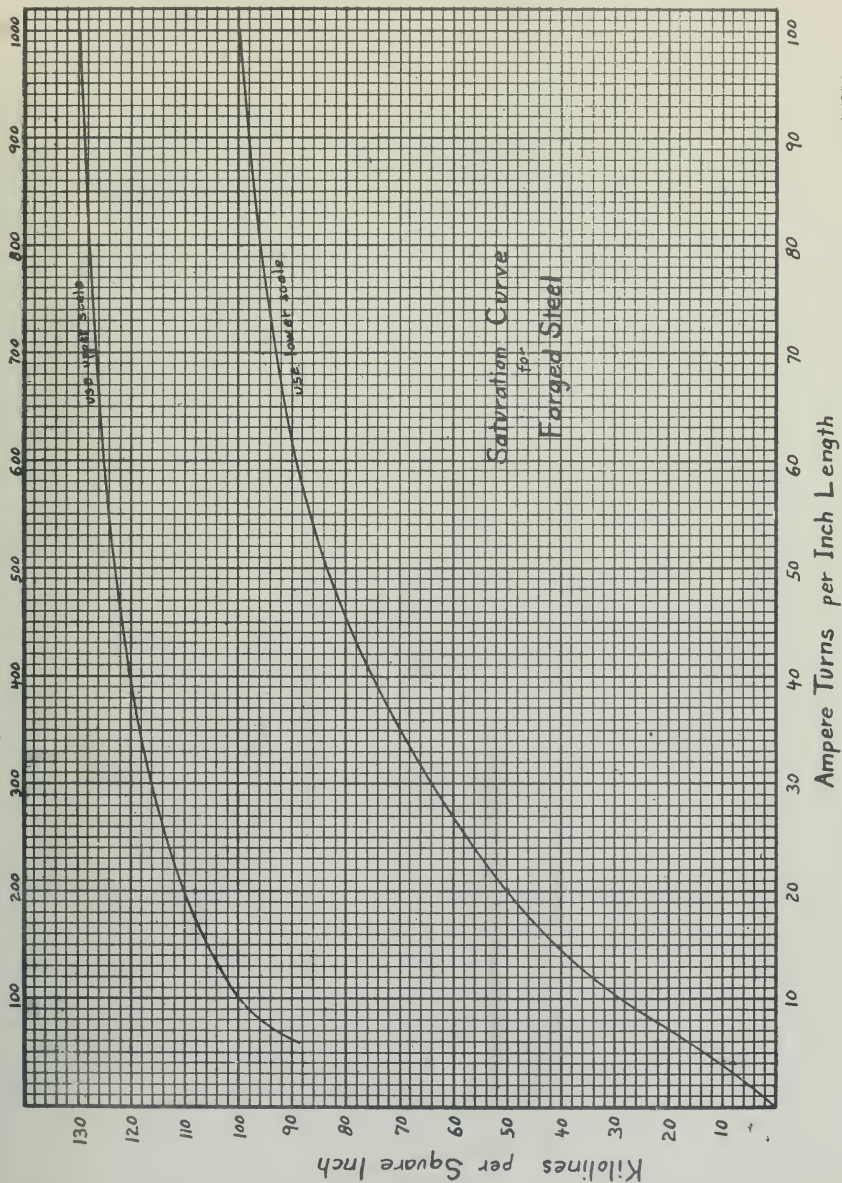

Kilolines per Square Inch

Fig. 3

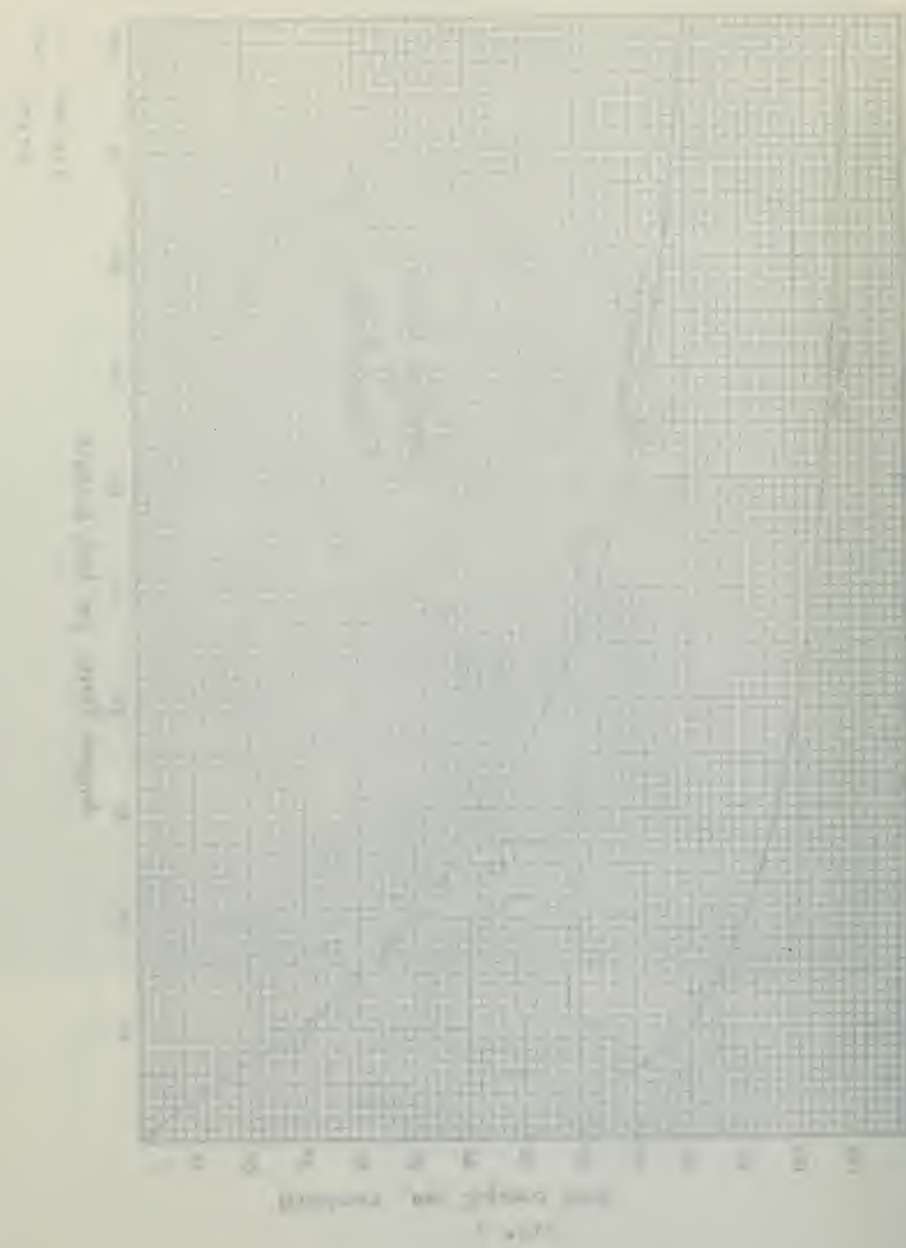

the great centrifugal forces due to the high peripheral velocities is one of the controlling features in the design. The weight of forged steel is also taken as 0.28 pounds per cubic inch.

Laminated steel punchings are used for the armature core and teeth, and for the pole pieces of our machine. The armature laminations will be a 1.0 Silicon steel 0.014 inches thick. See Figure 4. The pole pieces shall be made up of the same quality steel but shall be 0.0633 inches thick. This material is used by Westinghouse Electric Corporation in their smaller machine and is identified as their No. 9112 pole piece stock, Figure 5.

Silicon content controls the hysteresis and eddy current losses of a section of lamination; the higher the silicon content, the lower these losses. The higher the silicon content the lower the permeability, but in an over-all balance of the material, the lower the losses the better the design, and so we shall find that the major manufacturers are using a lamination grade with greater than 1.0% silicon content.

In the magnetic circuit of a machine there are two major losses which come into play to affect the over-all picture. These are the hysteresis and eddy current losses. The hysteresis loss is expressed in watts per cubic inch for one cycle per second at various flux densities and any thickness of sheet. Total loss then can be calculated by taking the basic loss and multiplying it by the total cubic volume and frequency. In the same manner the eddy current losses are expressed in watts per cubic inch for one cycle per second at various den-


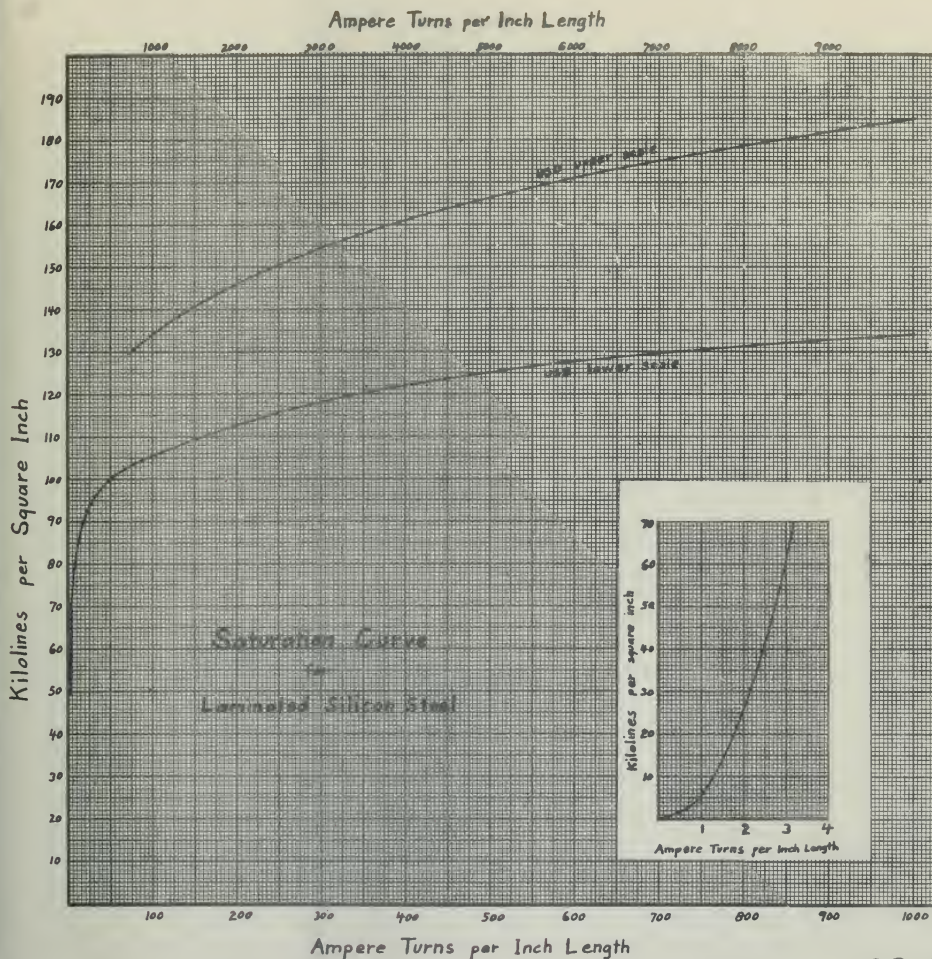


Fig. 4

RP 271

11 Sept. 1940 OT



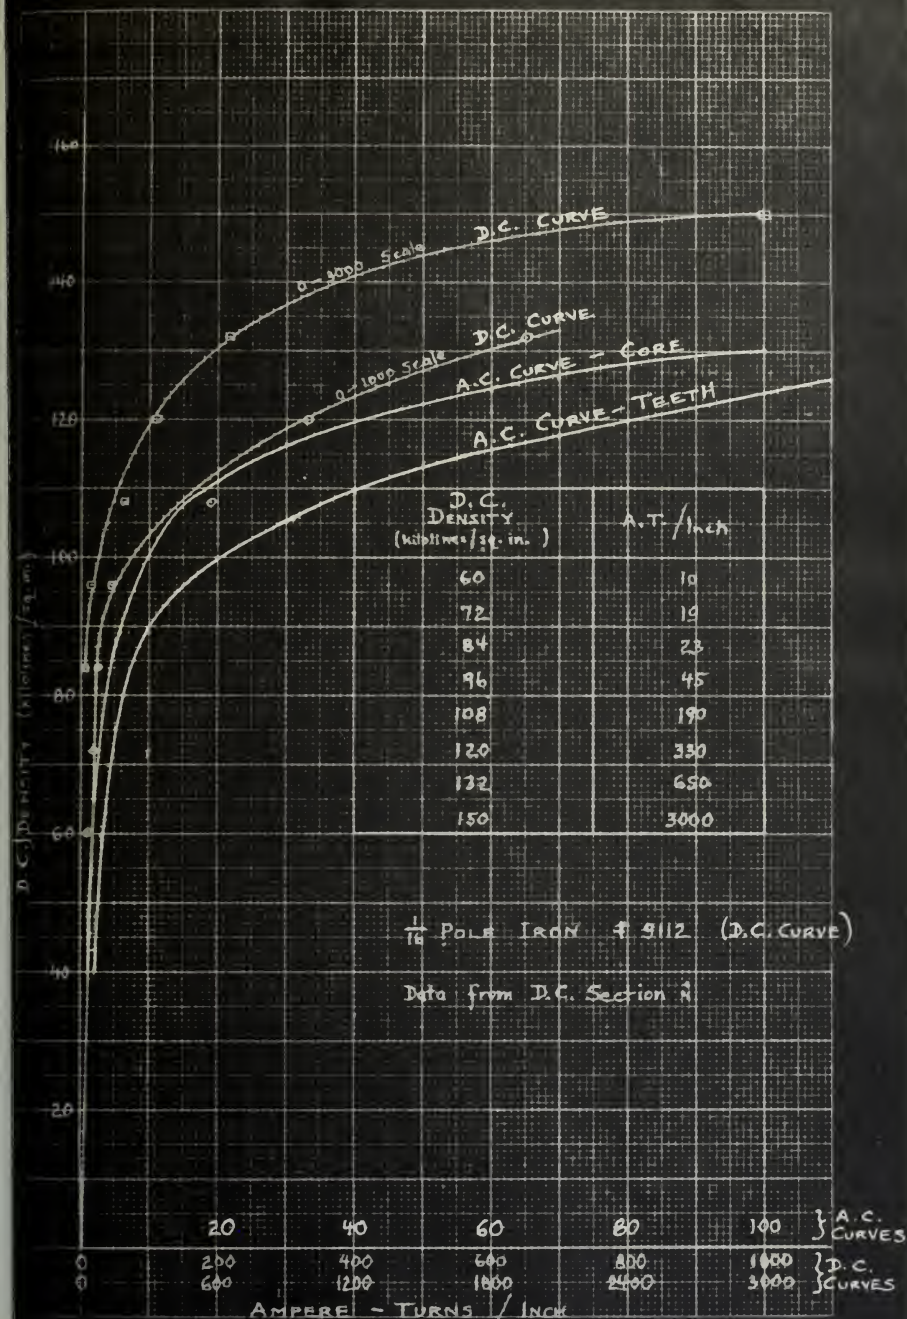

100-100

100-100

sities and for a standard thickness of lamination. The total loss then becomes the basic loss and multiplying it by the volume in cubic inches and by the square of the frequency.

The hysteresis and eddy current loss expressions we shall use are based upon the use of 0.014 inch thick, 2.3 Silicon steel laminations, and are as follows:

$$\text{Hysteresis loss in watts} = K \cdot V \cdot f \cdot B^{1.6}$$

$$\text{where } K \text{ is a constant} = 5.25 \times 10^{-8}$$

V - volume of the steel section in cubic inches

f - frequency in c.p.s.

B - magnetic density in kilolines per square inches.

$$\text{Eddy current loss in watts} = K \cdot V \cdot (t f B)^2$$

$$\text{where } K \text{ is a constant} = 254 \times 10^{-8}$$

V - as before

f - as before

B - as before

t - thickness of lamination in inches.

2. The Electric circuit

The electric circuit consists of the armature windings and the field windings. These consist of in our case flat armature conductors adaptable to ease of forming, insulating, and inserting in the armature slots. The field windings are form-wound No. 13 A.W.G. wire, round in section, and pre-wound over dummy poles mechanically for ease and lowered production costs. The use of these form-wound coils is almost universal at the present time and about the only exceptions are the very small fractional horse power motors

where the windings are sometimes wound directly on the rotors or into the armature slots.

The flat armature conductor is used to get the maximum amount of copper into the small armature slot and thus reduce the I^2R loss of the whole machine.

It is evident that the waste space between the round wires is greater than between rectangular wires packed together. We do not have a machine of such size that there is reason to increase the cost of the pole structures by flattening the pole coil wires to conserve space. The added cost of additional forming of the field pole wire by flattening and winding on the pole form is not justified when there are only twenty poles per machine, eight machines to be built. It is feasible in the armature slot case since there is need of keeping the losses down and to conserve space so that the slot proportions shall be within structural and magnetic reason and still have the minimum number of slots per pole per phase (two) to justify our assumption of a sine wave flux distribution over the pole face required for good generation. In the case of the pole piece laminations the only difference will lie in the length of the pole piece, which can be worked into the design prior to the manufacturing stage with a minimum of effort and expense.

The conductors shall be of annealed soft drawn copper, the electrical characteristics of which are given in the table next below. This is called copper of 100 percent conductivity and the figures are taken from the values given by the Bureau

THE HISTORY OF THE
CITY OF BOSTON
FROM THE FIRST SETTLEMENT
TO THE PRESENT TIME
IN TWO VOLUMES
BY NATHANIEL BENTLEY
OF THE BARR, AT LAW
IN THE CITY OF BOSTON
PUBLISHED BY J. B. BENTLEY
AT THE CORNER OF NASSAU AND NINTH STREETS
IN THE CITY OF BOSTON
1855

of Standards in Circular No. 31 and adopted as standard by the A.I.E.E.

Characteristics of copper as a Conductor, 100% conductivity: temperature, Centigrade degrees -				
	0	25	75	100
1. Resistance of 1000 ft. of 1 sq. m. section	0.0095	0.0083	0.0099	0.0107
2. Resistance of 1 ft. of 1 circ. mil section	9.55 10	10.55 10	12.65 10	13.67
3. Relative resistance	1.00	1.106	1.32	1.427

It is customary to operate the copper conductors of electric machines at densities of current from 1000 amperes per square inch to 3000. On small or very well ventilated machines where the heat generated is of a low value, the higher value will be found. In our particular case it was found after some estimations and preliminary calculations that a value of some 1200 amperes per square inch was very satisfactory, and this value level was utilized throughout.

3. The dielectric circuit consists of the insulating material which separates the copper conductors from one another and from the steel core and frame of the machine. The function of this circuit is to make it possible to arrange conductors lying adjacent to one another in a series circuit so that the voltages induced in them will be additive in a predetermined manner. It also confines the current to a definite path in the wires instead of allowing it to stray through the frame of the machine.

The properties which a good insulating material should have are four in number, namely:

(1) A high resistance to the flow of current. This is known as insulation resistance.

(2) The ability to withstand a high voltage across a small thickness without breaking down and permitting current to flow. This is known as dielectric strength.

(3) A reasonable mechanical strength to withstand bending, vibration, abrasion, and shock.

(4) The ability to conduct the heat energy from the conductors to the body of the machine without an excessive difference in temperature.

The insulation resistance of a machine is measured from the copper of the winding through the insulation to the frame of the machine. Its magnitude depends greatly upon the presence of dirt and moisture, particularly moisture. Drying or baking will usually increase the insulation resistance greatly. Usual values for the proper insulation resistance of machines vary from 50,000 ohms to several million ohms. The higher values are for smaller machines and high-voltage machines. Standardization rules of the A.I.E.E. cover this matter with thoroughness.

The specifications of our machine require an insulation resistance of the stator and field windings when corrected to 25 degrees Centigrade, of not less than 25 megohms for our Class A insulation.

The dielectric resistance of an insulating material is measured by applying an alternating voltage to a sample of the material of a specified thickness, and gradually increasing the voltage until the insulation breaks down, a spark passes, and an appreciable current flows. The root mean square of the voltage which caused the break-down is specified as the

dielectric strength of the sample. A conventional figure of the dielectric strength of a material is often specified as the root mean square of that alternating voltage which a sample of a thickness of one mil will stand for one minute.

The mechanical strength of an insulating material is not capable of being defined specifically. One test is to determine how many times a thin sample will flex at right angles, first one way then the other, without breaking.

In reference to the effect that high temperatures will have on them, insulating materials are divided into classes. The Standardization Rules of the A.I.E.E. state that cotton, silk, paper, and similar materials impregnated with varnish, will not stand a higher temperature than 105°C. without becoming permanently damaged, while mica, asbestos, and similar materials can stand temperature up to 125°C. without becoming permanently damaged. It is an inherent characteristic of electric machines that their various parts become heated during operation because the various losses turn into heat. Consequently the limit to the output of such a machine is the maximum temperature which its most delicate part will stand without permanent injury. The insulation is most easily injured by heat, hence the necessity of knowing what temperature it can stand without damage and limiting the output of the machine to that value which will not produce a temperature so high that the insulation will be ruined.

The ability to conduct heat is desirable, since the copper windings of the machine are usually the hottest part

and the only way the heat can escape the copper is through the insulation. The better the heat-conducting qualities of the insulation the lower will be the difference in temperature between the copper and the surrounding air. It is unfortunate that all the materials that are insulators for electric currents are also very poor heat conductors, so that the designer has to do the best he can to get around this tendency of nature. Impregnating the cotton fabrics with oil or varnish and making them solid is one way of making them better conductors of heat. An alternate way, and the way we choose, is to reduce their thickness so that the temperature gradient is low from copper to surrounding air and in that manner let the air be the heat dissipating medium. The problem in this case, for our armature conductors, was to get an insulating varnish with a high dielectric strength that would withstand the copper temperatures. After calculating the copper temperatures, and the 'hot-spot' temperatures of each slot, we found that any insulating varnishes such as G-E's Numbers 9435, a synthetic resin asphaltic varnish, or 7148, their phenolic, modified Glyptal base varnish would do the job. These varnishes have a thin dried covering thickness, a high flash point, greater than 1500 volts per mil dielectric strength, excellent adhesion, toughness, hardness, flexibility, penetration, bonding, and ageing flexibility. Their resistance to usual chemicals is from good to excellent in rating, and they can be either air dried or baked to the coils.

In the case of our field coils, the covering will be double cotton covered. Cotton is applied in the form of a spun braid to the wires before they are wound on the coils. The double cotton covering has a thickness which increases the overall diameter of the wire from 0.072 inches to 0.085 inches. The cotton is left dry and natural until the coil is made up, and then the whole coil is impregnated with varnish in order to exclude moisture and to give the coil insulation better heat conducting qualities. Cotton tape will be used to bind the finished coil for mechanical protection.

As we have already stated we used an enamel coating for the armature conductors. It is applied by running the pre-formed wires through a small vat containing the varnish. The coating is assumed to be very thin, about 0.002 inches. It is reputedly very brittle and therefore can only be used where there are no sharp bends. This becomes a design problem, but preliminary investigations indicate that in our case, the wire is of such a size and follows such a path that **there are no** bends whose radius is less than the widest section of the wire, and those bends that do exist are only half a quadrant in arc in these cases.

4. General limitations in design and choice of cardinal dimensions.

Preliminary dimensioning for the first calculations of any machine require that these three factors be taken into consideration. They are the three fundamental limiting factors. If reasonable values are assigned to these, a workable

design is easily deduced. The factors are:

(1) The peripheral speed at the periphery of the armature or revolving part, the pole shoe outer perimeters, usually expressed in feet per minute, is generally tabulated in the reference for our size machine as from 2,000 to 5,000 fpm. We used the formula, using k_s , (pole pitch/length arma. core), equal to unity for best utilization of available space, which appears as shown below on the design sheets used at the Naval Postgraduate School:

$$v = 124 \sqrt[3]{\frac{k_s K_a R n}{\Delta B_g}}$$

This formula gives a peripheral velocity of some 2,840 fpm which lies well within the values generally accepted as satisfactory for a machine of our design size.

(2) The magnetic density in the air gap or at the pole face, which we choose from tabulated values given in the various references on the subject as 30,000 lines per square inch, is another of the three limiting factors. The value of this is limited by the amount of m.m.f. we can afford to put on the poles and the amount of core loss and consequent heating in the iron, as a high value of B in the gap infers also a high density in the armature.

(3) The third factor is the density of the current stream on the surfaces of the armature, what we term peripheral current density, Δ , expressed in ampere conductors per inch of periphery, that is, the product of the total number of conductors on the armature surface multiplied by the current in

each conductor and divided by the perimeter of the armature. It can be seen that this is a measure of the total loss in the copper of the armature of the machine and of the heat produced thereby.

5. Discussion of the arbitrary constants.

(1) Ratio of pole arc to pole pitch.

This factor is governed by two opposing phenomena. For the sake of a small magnetic leakage and good form factor of e.m.f. wave, a low value of this ratio is desired to reduce the pole-to-pole flux leakage. For the sake of low reluctance to the main flux and economy of material in the whole machine, a high ratio is desired. The usual range for rotating fields in the size machine we have is from 0.5 to 0.7, and we have chosen a conservative 0.65 which worked out satisfactorily. At the bases of adjacent poles the field windings of these adjacent poles come within one half inch of meeting, therefore providing sufficient space for passage of cooling air as well as utilizing as much of the available space as is deemed prudent for the cooling required.

(2) The pole face, or air gap density.

This flux density is limited by the exciting ampere-turns on the field required to produce the flux, the length of the air gap radially, and sometimes by the heating of the iron from the core losses. The range is from 30,000 to 60,000 lines per square inch of section. We chose 30,000 for our small machine of low speed in order to reduce the size of the machine and also to reduce the effect of the core loss heating.

(3) The peripheral current density, Δ , is limited by the copper loss it produces and distortion produced by the armature m.m.f. We feel that our machine with its one ventilating duct is exceptionally good for ventilating requirements, and also because our insulation is conservative, we can choose a fairly high value of Δ . Ours is in the neighborhood of 1200, some 300 units greater than recommended for a low-speed, solid stator type machine.

(4) The peripheral velocity.

This velocity is altogether a function of the mechanical design, which fortunately in our case reaches no great moment. Usual value for which there appears no great concern as to mechanical stress limiting values are from 2,000 to 6,000 f.p.m.


(5) The armature diameter is usually set when the speed is chosen, since ordinarily the speed in r.p.m. at which the machine is to run is one of the specified conditions. Combined with this dimension is the length, ℓ , of the armature between heads or end bells. It is dependent upon the ratio between the internal KVA of the machine and the product of the specific output and diameter chosen.

We now have discussed, in general terms, the magnetic circuitry, the insulation and windings problems, and some aspects of the ventilation and rotative speed problems. Now we shall turn to a discussion of the static voltage regulation and field excitation of our machine, its circuit, and how it is to operate.

VI - THE REGULATION AND FIELD EXCITATION

This particular chapter deals with that portion of the design which interested me in the idea of the design as a thesis subject. I admit now that to fully cover the complete subject would require more time than there is (and was) available. In order not to fail to include some discussion on the subject of this chapter, I am putting down on paper a system which I believe can be worked out for such a machine as I have designed. It will meet the letter of the specification which precludes use of electronic devices which if they fail will cause failure of the system.

This is the basic block diagram of the system of regulation and field supply.

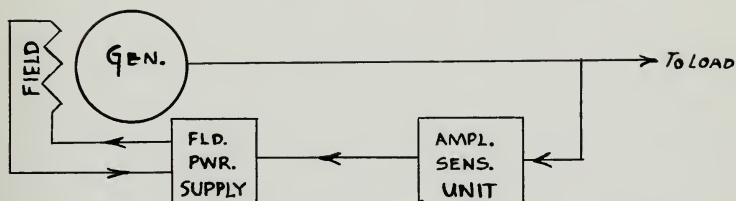

This is a Ward-Leonard REACTROL voltage regulator system. The REACTROL voltage regulator changes the generator field excitation in reverse relation to the changes in the output voltage of the generator. Therefore it resists any change in the generator output voltage.

Field voltage of this system is produced as a function of load and power factor. It is in inverse relation to changes in generator voltage due to load changes.

The amplifier sensing unit contains three major circuits.

They are shown on the attached Figure 17, the circuit of the block diagram above.

The three circuits are: 1 - The constant voltage circuit; 2 - The variable voltage circuit; and 3 - The magnetic amplifier circuit. They will be identified in this discussion as circuits 1, 2, and 3. The outputs of circuits one and two oppose each other and their resultant is fed to the control winding of the first stage of the third circuit, the magnetic amplifiers. When circuits one and two outputs are equal, no current flows to three. When circuit two output current is less than that of number one, current flows in one direction, and when the opposite situation exists, the reverse occurs. The power level of this current is too low for direct operation of the saturable reactors L6, L7 and L8, in the field power supply, and therefore the magnetic amplifiers circuits are used to elevate this power supply to the reactors.

In circuit three the output of the anode windings is controlled by the control circuit windings and the anti-hunt windings. The control windings change the saturation of the field power supply saturable reactors in proportion to the current flowing in them, thus changing the impedance of the anode windings in reverse proportion so that the output of the anode windings changes in proportion to the control current from one and two. The current flowing through the anti-hunt windings modifies the response of the saturable reactors to damp the oscillations of the system and thus prevent hunting. The second stage of the third circuit is the same as the first. The inclusion of the second stage, because of the transient re-

ARTICLE
THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

BY
DR. J. H. HARRIS, JR.,
CHICAGO, ILL.

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

THE PROBLEM OF THE PHYSICIAN IN THE PRESENT
ECONOMIC SITUATION

sponse time shortening characteristic of magnetic amplifiers, is made to reduce the time of response of the field power supply to changes in the generator output.

Whenever the generator voltage causes this difference between the constant and variable voltages to increase in a positive direction due to changes in the machine load, temperature, or RPM, the magnetic amplifier output goes up and increases the saturation of the field power supply reactors L6, L7 and L8. This in turn causes more power to the field, and the generator output is increased. This last increase causes a reduction in the difference of circuits one and two.

Rectification is accomplished at various points along the path of the difference of circuit one and two outputs, and arrives at the field in the sense indicated.

Power for the field up to no load conditions of generator output is supplied by the starting batteries of the diesel driver.

APPENDIX

1. The Calculations.

The calculations which follow are based upon the assumptions that the calculator has basic knowledge of alternating current theory and the use of vectors. The treatment will be kept as free of unreasonable assumptions which in the design of any machine will make it impossible. On the other hand, the only assumptions which will be made will be those which are consistent with design practices of the major concerns doing this type of work today. The form followed will be that used by the students of the Naval Postgraduate School as compiled by Professor C. V. O. Terwilliger, Head of the Department of Electrical Engineering at that institution.

We shall assume that the designer has the basic knowledge connected with elementary electric circuits, the variation of resistance with temperature, open coil wire resistances, insulated coil wire sizes, capacities, insulation thicknesses, dielectric circuitry, insulation permittivities of various types and thicknesses of insulation to be encountered in this size machine.


The number of poles of the alternating current generator depends directly upon the speed in revolutions per minute of the machine and the designed frequency of its output. Our RPM and frequency are 360 and 60 respectively, as stated in the specifications for the machine.

Our machine will have salient poles because of their lessor cost than the machined rotor case, and also because we

need not worry about the peripheral speed of the field pole tips since they are going to rotate at but 360 R.P.M. at a diameter which we know from previous observation to be less than say, three feet in diameter. The stresses set up in the pole roots will be of such a small magnitude that there will be no major problem at this point. As it turns out there will be a peripheral speed of the field pole pieces at their extremities of but some 2800 f.p.m. and the mechanical stresses set up at the tooth roots, as shown in later calculations, will be of the order of twelve hundred pounds per square inch of root area, insufficient to cause concern.

The number of phases is set by the specifications to be three. This will not affect the design as far as its complexity is concerned, and so we shall spend no time discussing the aspects which should be noted in this instance.

Whatever may be the type of machine we shall end up with, we may consider the armature conductors to be cut by the magnetic lines in the manner indicated in the figure below. The alternate pole pieces are supposed to move across the armature conductors in the direction indicated by the green arrow. The conductors are connected in a simple wave winding only to simplify the diagram, and it is readily understood that each coil may contain any number of turns.

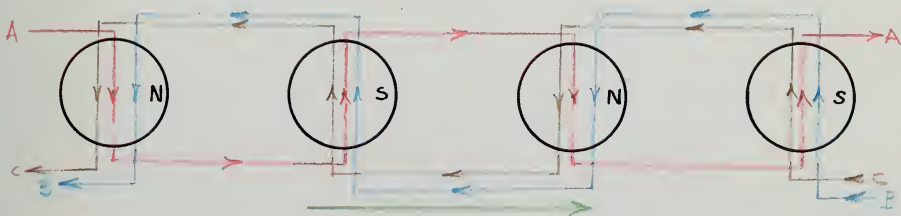

Attention is paid to the manner of each coil's connections to the succeeding coil, in order that the e.m.f.s generated in the various coils shall not oppose each other. It should also be noted that these coils indicate a full pitch winding whereas our winding will be a $5/6$ ths pitch in order to cut down on the 5th and 7th harmonics arising in the generation of the e.m.f. in each coil. There are no 3rd, 9th, 15th, and further odd harmonics to worry about in the two conductor per coil, $5/6$ ths pitch, star connected, lap winding which we have chosen for our machine. The figure shows the coil A position when its generated e.m.f. will be a maximum, while in B coil it is 120 degrees from the A coil, as is the case of the C coil also. The e.m.f. in the A coil is at a maximum, then, while in coils B and C the e.m.f.s are of a smaller value and in opposite directions.

Usual speeds of alternating current generators are listed in this table following:

<u>Output, KW</u>	<u>No. of poles</u>	<u>Speed, RPM</u>
0 to 10	2 or 4	2,400 to 600
10 to 50	4	1,300 to 350
50 to 100	4 or 6	1,100 to 250
100 to 300	6 or 8	800 to 200
etc.		

Our machine falls in the 50 to 100 KW output class, and our r.p.m. fall into line, being 360 by the specifications.

We shall assume without compunction as to its veracity in our design, that the form factor for distributed windings

shall be 1.11. The development of this value is based upon the assumption that the space distribution of the flux density over the pole pitch follows the sine law, and if this is so, then the virtual value of the e.m.f. is 1.11 times the mean value. In other words, the form factor, or ratio of r.m.s. to mean value of the e.m.f., is $\pi/2\sqrt{2}$, or 1.11, in the case of the sine wave. As each coil side may be thought of as occupying a very small width on the armature periphery and if the coil sides of each phase winding are spaced exactly one pole pitch apart, the arrangement would consist of what is usually referred to as a concentrated winding. In practice a winding with only one slot per pole per phase would be thought of as a concentrated winding. When there are more than two or more slots per pole per phase, the winding is said to be distributed. One slot per pole per phase winding will not give true sine wave flux distribution necessary for our form factor assumption, and two slots per pole per phase is the minimum for this assumption within the limits of the accuracy required for a reasonable design.

We shall proceed now with the general calculations required to lay down the design of a generator such as required by our specifications. At this point it is well to note that there are several set methods to follow in any design of alternating current machinery. They all accomplish what the planner requires to assemble a workable machine. We refer to the text references of the bibliography for additional assumptions.

Procedure and Calculations:

1. Specifications.

Capacity - KW	KW = 75.00
Power factor -	PF = 0.80
Capacity - KVA	KVA = 93.75
No. of phase - p'	p' = 3
RPM - R	R = 360
Terminal volts, full load -	$E_L = 240$
Amperes, line, full load -	$I_L = 225.50$
Regulation at PF -	$0.80, = 3.0\%$
Frequency - n	n = 60 cps

DEPARTMENT OF ELECTRICAL ENGINEERING

ALTERNATOR DESIGN —

Name C. F. SCHARFENSTEIN, JR.Date of beginning 1/3/50Date of completion 4/17/50

SPECIFICATIONS

Capacity, $K. W. = 75.00$ Power factor, $p. f. = 0.8$ Capacity, $K. V. A. = K = 93.75$ Number of phases, $p' = 3$ If direct-coupled, $r. p. m. = R = 360$ Frequency, $n = 60$ Terminal volts, full load, $E_t = 240.0$ Amperes line, full load, I_t

Inherent Regulation (non-inductive load) =

Regulation at power factor of $0.8 = \pm 3\%$ Max. allowable temp. rise, degrees cent., $T = 50^\circ C$,

Other heating specifications —

PRELIMINARY APPROXIMATIONS

Type Form factor, $k_f = 1.11$ Ratio pole arc to pole pitch, $k = \frac{1.11 \text{ for stator}}{.65 \text{ for rotor}}$ Peripheral current density, $\Delta = 12.00$ Resistance drop in armature $\div E, q_r = 0.018$ Internal volts $\div E = \sqrt{(q_r + p.f.)^2 + (q_x + \sqrt{1 - p.f.^2})^2} = q_{x_a} = 1.0206$ Internal $K. V. A. = q_{x_a} K = K_a = 95.68$

Star or Delta *

Internal volts per phase $q_{x_a} E = E_a = 142.5$ Differential factor, $k_d = .966$ $k_f k_d = k_{fd} = 1.07226$ Mean gap density at pole face, $B_g = 30,000$ Coil pitch \div pole pitch, $k_p = 0.833$ E. m. f. pitch factor, $k_p = \sin \frac{\pi}{2} k_p = 0.966$ Leakage reactance drop $\div E, q_x = \frac{I_a X_a}{E_a} = 0.01$ Terminal volts per phase, $E = 138.575$ Amperes per phase = $1000 K_a \div (p' E) = I_a = 225.5$ Number of poles = $2 \times 60 \times 60 \div 360$ $R. p. m. = 60 n \div p = \frac{60 \times 60}{10}$

Peripheral velocity, ft. per sec. = see below

Diam. of arm. at air gap = $720 v \div (\pi \times R. p. m.) = d$ Specific output = $12 \pi k_{fd} k_v \Delta B_g 10^{-11} =$ Length arm. core = $K_a \div (k_d k_p) =$ Pole pitch = $6 v \div n =$ Pole arc = $k \lambda_p =$

2p	20								
R	360								
v	47.343 (1)								
d	30.15 = $720 \times 47.343 \div \pi \times 360$								
k ₀	0.6766 = $12 \pi \times 0.966 \times 1.07226 \times 47.343 \times 1200 \times 30000 \times 10^{-11}$								
l	4.698 = $95.68 \div .6766 \times 30.15$								
λ_p	4.73 = $6 \times 47.343 \div 60$								
λ_p	4.73 = 1×4.73								

If $k_3 (= l_p \div l)$ be assumed $v = 15 \sqrt[3]{\frac{k_3 K_a T_m}{\Delta B_g}}$
 $k_3 = 1$ for a value of the constant of 124

$$(1) v = 124 \sqrt[3]{\frac{1 \times 95.68 \times 360 \times 60}{1200 \times 30,000}} = 124 \sqrt[3]{0.054667} = 124(.3818)$$

$$= 47.343 \text{ fps}$$

$$= 2840 \text{ fpm}$$

DEPARTMENT OF MATHEMATICS

EXAMINATION FORM

NAME OF CANDIDATE: _____
 DATE OF EXAMINATION: _____

QUESTIONS

1. A man starts at a point and walks 3 miles North, then 4 miles East, then 3 miles South, then 4 miles West. How far is he from his starting point?
2. A man starts at a point and walks 3 miles North, then 4 miles East, then 3 miles South, then 4 miles West. How far is he from his starting point?
3. A man starts at a point and walks 3 miles North, then 4 miles East, then 3 miles South, then 4 miles West. How far is he from his starting point?
4. A man starts at a point and walks 3 miles North, then 4 miles East, then 3 miles South, then 4 miles West. How far is he from his starting point?
5. A man starts at a point and walks 3 miles North, then 4 miles East, then 3 miles South, then 4 miles West. How far is he from his starting point?

ANSWERS

1. 5 miles
2. 5 miles
3. 5 miles
4. 5 miles
5. 5 miles

1	5	5	5	5	5
2	5	5	5	5	5
3	5	5	5	5	5
4	5	5	5	5	5
5	5	5	5	5	5
6	5	5	5	5	5
7	5	5	5	5	5
8	5	5	5	5	5
9	5	5	5	5	5
10	5	5	5	5	5

$$\frac{1}{2} \times \frac{1}{2} = \frac{1}{4}$$

$$\frac{1}{2} \times \frac{1}{2} = \frac{1}{4}$$

$$\frac{1}{2} \times \frac{1}{2} = \frac{1}{4}$$

Approximate Values

$$\text{Volts per inch of active conductor} = \frac{k_p}{k_A} k_v B_p 10^{-4} = e''$$

$$\text{Total active conductor, inches} = p' E_a \div e'' = l_{ac}''$$

$$\text{Approx. total number of active cond's.} = l_{ac}'' \div l = N_a$$

$$\text{Slots per pole per phase } \textit{assumed}$$

$$\text{Total number of slots}$$

$$\text{Conductors per slot} = N_a \div N_t$$

Adjusted Values

$$\text{Total number active conductors} = N_{ca} N_t =$$

$$\text{Active conductors per phase} = N_a \div p' =$$

$$\text{Periph. current density} = N_a I_a \div \pi d =$$

$$\text{Allowable watts per sq. inch arm. copper} \\ = \Delta \div \odot_a = (.5 \text{ to } 1.2) =$$

$$M_{\text{arm. Cir.}} \text{ mils per ampere in arm. copper} = \Delta \div h_c =$$

$$\text{Section arm. cond. in cir. mils} = I_a \odot_a =$$

$$\text{Section arm. cond. in sq. in's.} =$$

$$\text{Flux (megalines) entering arm. per pole at full load}$$

$$= 100 E_a \div (2 k_{dA} h N) = \Phi_f$$

$$\text{Mean gap density at pole face} = \Phi_f \div l_p l =$$

$$\text{Volts per inch of active conductor} \\ \text{Number of vent. ducts in arm. core on basis of one for} \\ \text{each } 2\frac{1}{2}'' \text{ of armature length.}$$

$$\text{Width of each duct} - \textit{assumed}$$

$$\text{Net iron length of core} = .9 (l - N_a w_d) =$$

$$\% \text{ net iron length} = l_i \div l$$

$$\text{Tooth pitch} = \pi d \div N_t =$$

$$\text{Desirable app. density at tooth tip (rev. field assumed)}$$

$$\text{Width tooth tip } \div \text{tooth pitch} = B_g \div k_t B_H$$

$$\text{Width of tooth at tip} = h_{u\lambda_i} =$$

$$\text{Width of tooth } \frac{1}{2} d \text{ from narrow end}$$

$$\text{Ratio of } w_B \text{ to } \lambda_i =$$

$$\text{Width of slot} =$$

$$\text{Depth of slot} =$$

$$\text{Gauge number, diam. or dimensions of arm. cond.}$$

$$\text{Thickness of slot insulation, iron to copper} =$$

$$\text{Space factor of slot}$$

$0.1765 = 12 \times 0.466 \times 1.07226 \times 1.47343 \times 30000 \times 10^{-8}$					
$2355 = 3 \times 138.575 \div 0.1765$					
$502 = 2355 \div 4.698$					
2					
120					
4.18					
Use $N_{cs} = 4$					
$480 = 4 \times 120$					
$160 = 480 \div 3$					
$1183 = 480 \times 225.5 \div \pi \times 30.15$					
$1.183 = 1183 \div 1000$					
1000 assumed					
$225500 = 225.5 \times 1000$					
$0.177 = \frac{\pi}{4} \times 10^{-6} \times 225500$					
$0.716541 = \Phi_f = 100 \times 142.5 \div 2 \times 1.07226 \times 0.966 \times 60 \times 160$					
$32245 = 716541 \div 4.698 \times 4.73$					
$0.18972 = 12 \times 0.466 \times 1.07226 \times 1.47343 \times 32245 \times 10^{-8}$					
1					
0.5					
$3.78 = 0.9 (4.7 - 1 \times .5)$					
$0.805 = 3.78 \div 4.698$					
$0.79 = \pi \times 30.15 \div 120$					
$8016 = \frac{B_g \times 2}{k_t} = 32245 \times 2 \div 0.805$					
0.5 assumed for best construction					
$0.395 = \frac{1}{2} \times 0.79$					
$0.42 \pm$ Fig. 6					
$0.532 = 0.42 \div 0.79$					
0.395					
2.162					
$\frac{0.185 \times 0.956}{0.020} \}$ about No. 0000 AWG					
$0.020 = \text{Press board} + \text{enamel}$					
$0.72 = 4 \times 0.177 \div \left[.395 + 2.162 + \frac{2.162 \times 0.065}{2} \right]$					

Draw a winding diagram showing clearly the type of winding and the connections. See Figs. 1 and 15
Make a large scale sketch of tooth and slot showing conductors and insulation. See Fig. 6

(1)

$$W_3 = 0.02 + 0.01 + 0.02 + 2b$$

$$b = 0.185$$

$$h = 0.177 \div b = 0.956$$


$$d_3 = 0.02 + 2h + 0.01 + 0.02 + 0.1 + 0.1$$

$$= 2.162$$

(49)

Slot Section

Scale: 2"-1"

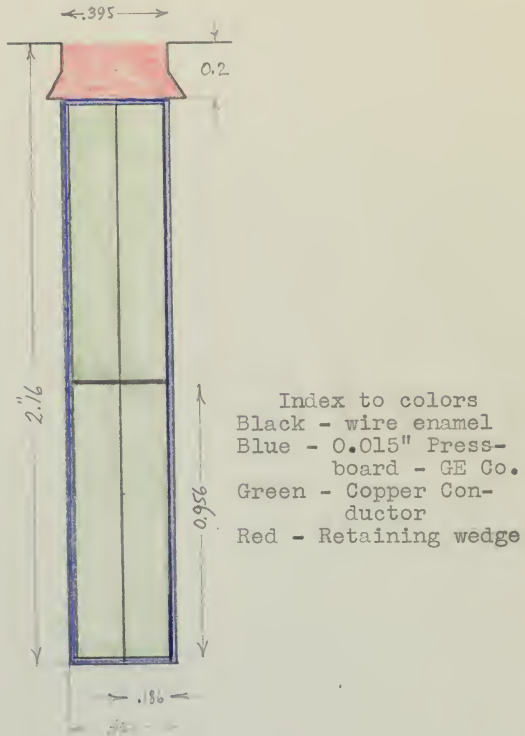

NB: All dimensions are in inches;



Armature Core

Thickness of laminations, inches

Armature core density, assumed

Section back of slots $\Phi_f \div 2 B_a$ Radial depth back of slots $= s_a \div l_i =$

Outside diam. arm. core

Volume core, excluding teeth, (cu. inches)

Hysteresis watts per cu. inch $= 2 \frac{n}{100} \left(\frac{B_{max}}{10^6} \right)^{1.6} =$ Eddy watts per cu. inch $= \left(\frac{n}{100} \times \frac{B_{max}^2}{10^6} \times 100t \right)^2 =$ Total watts per cu. inch $= P_h' + P_e' =$ Total watts lost in core, excluding teeth $=$

Teeth

Apparent density $\frac{1}{2}$ from narrow end $= B_g \div k_i k_m =$

Corrected density

Hysteresis watts per cu. inch

Eddy watts per cu. inch

Total watts per cu. inch

Volume of teeth, cu. inches

Total watts lost in teeth

Total Iron

Load loss due to distortion, [25% of $(P_c + P_t)$] $=$ Total iron loss $= P_c + P_t + P_d =$ Iron loss in terms of output $= 1696 \div 75000$

Copper

Actual section arm. cond. in cir. mils


Corresponding cir. mils per ampere $c.m.a. \div I_a =$ Active length arm. cond. \div gross length $=$ Length arm. cond. inches per phase $= NI \div k_i =$ Hot resistance per phase $= l_{ac}' \div c.m.a.$ % resistance drop $= I_a r_a \div E_a = 1 \div (k_i e'' \odot_a) =$ Total arm. copper loss $= p' I_a^2 r_a =$ Total armature loss $= P_t + P_{ac} =$

t	0.014	170.5	Silicon Sheet Steel
B_a	23700	$= 716541 \div 2 \times 3.78 \times 4.00$	
s_a	15.12	$= 3.78 \times 4.00$	
	4.00	See above	
D_a	42.5	$= 30.15 + 2 \times 2.162 + 2 \times 4.00$	
V_c	1830	$= 3.78 \times \frac{\pi}{4} [(42.5)^2 - (34.5)^2]$	
P_h'	0.12	$= 2 \times \frac{60}{100} \times (0.23)^{1.6}$	
P_e'	0.0396	$= (6 \times 2.37 \times 1.4)^2$	
$P_h + e'$	0.1596		
P_c	293	$= 1830 \times 0.1596$	
B_{ta}	75290	$= 32245 \div 0.805 \times 0.532$	
B_{tc}	118200	$= 32245 \times \frac{\pi}{2} \times \frac{4.698}{3.78} \times \frac{0.79}{0.42}$	
	1.570	$= 2 \times 6 \times (1.18)^{1.6}$	
	0.985	$= (6 \times 1.18 \times 0.014 \times 10^4)^2$	
	2.555		
V_t	416.5	$= \frac{1}{2} \times 3.78 \times \frac{\pi}{4} \times (34.50^2 - 30.15^2)$	
P_t	1065	$= 416.5 \times 2.555$	
P_d	339	$= \frac{1}{4} \times (293 + 1065)$	
P_t	1696	$= 293 + 1065 + 338$	
$\% I$	0.0225	(P 297 Still)	
$c.m.a.$	125600		
\odot_a	1000	$= 225600 \div 225.5$	
k_i	0.421	See (2) below	
l_{ac}'	1783	$= 160 \times 4.7 \div 0.421$	
r_a	0.0079	$= 1783 \div 225500$	
q_{ac}	0.0125	$= 225.5 \times 0.0079 \div 142.5$	
P_{ac}	1205	$= 3 \times 225.5^2 \times 0.0079$	
P_{at}	2901	$1696 + 1205$	

Total Cu. Vent.
Surfaces

(1) Page 370 "Stime"
Net radial depth below slots $=$
 $= \Phi_f \div 2 B_a l_i$
 $= 716541 \div 2 \times 23700 \times 3.78$
 $= 3.94 \text{ ins.}$

(2)

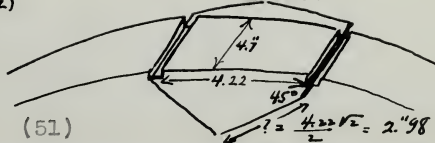

Peripheral surface or arm. including coil ends

 S_a

3740

2310

1430

(1)

Watts dissipated per sq. in. per deg. cent.

 H_a 0.012⁺

0.025

Page 235 - WALKER

Temperature rise of arm. = $P_{at} \div H_a S_a = \frac{1205}{.012 \times 2310} \text{ and } \frac{1696}{.025 \times 1430} T_a$

43.5

47.4

If this exceeds the allowable temp. rise a readjustment must be made.

MAGNETIC CIRCUIT

	a Arm. Core	t Teeth	m Mag. Core	y Yoke
Leakage coefficient at full load	—	—	1.18	—
Flux at full load	716 541	188 000	171 000	—
Material	STEEL	STEEL	1" POLE IRON	FORGED STEEL
Density, full load	23 700	118 200	38 000	75 000
Net section, sq. inches	15.12	1.59	4.5	4.56
Mag. length for a complete mag. circuit	Fig. 7 4.6	2.16	4.28	2.12

Air gap

AIR

322.5

20.25

0.25

Make scale drawings (two sections) of magnetic circuit. See Fig. 7

Compute and plot a magnetization curve (E_a vs. N_i) for each of the above parts of the magnetic circuit, and one for all of them together. See Fig. 8

Arm. flux per pole		B_a	N_a	B_m	N_m	B_i	N_i	Total for Iron	B_a			
% of Φ_f	$\times 10^3$	$\times 10^3$		$\times 10^3$		$\times 10^3$	$\times 10^3$	N_i				
.70	502	16.6	7	82.8	21	26.6	42.8	52.5	46	117	94.7	
.80	564	19.0	8	94.6	56	30.4	43.0	60.0	57	164	114.0	
.90	645	21.3	8	106.5	135	34.2	45.0	67.5	70	248	128.	
.95	681	22.5	8	112.5	431	37.1	47.0	71.3	78	465	135.	
1.00	716.5	23.7	8	118.2	647	171	38.0	49.0	75.0	85	140	142.5
1.05	753	24.9	9	124.2	1015	39.9	50.0	78.8	93	1267	149.7	
1.10	788	26.1	9	130.0	1562	41.8	52.0	82.5	103	1726	157.0	
1.20	860	28.4	9	142.0	3451	45.6	56.0	90.0	130	3647	171.2	
1.30	930	30.8	10	154.0	6340	49.4	65.0	97.5	186	6600	185.4	

$$NI_{\text{air gap}} = 0.313 \times l_{\text{air gap}} \times B_g$$

$$(1) \text{ External Conductor Surface area} = [(47.5) + 4.22] \hat{1} \times 30.15 + 2 \times \frac{\hat{1}}{4} \left[(30.15 + 2 \times 2.162 + 2 \times 4)^2 - (30.15)^2 \right] = 2310 \text{ in}^2$$

$$\text{VENTILATING duct surface area} = 2 \times \frac{\hat{1}}{4} \left[42.5^2 - 30.15^2 \right] = 1430 \text{ in}^2$$

Machine Section - not to scale

Dimensions in inches



FIG. 7
(53)



Amperes per phase vs. Volts per phase

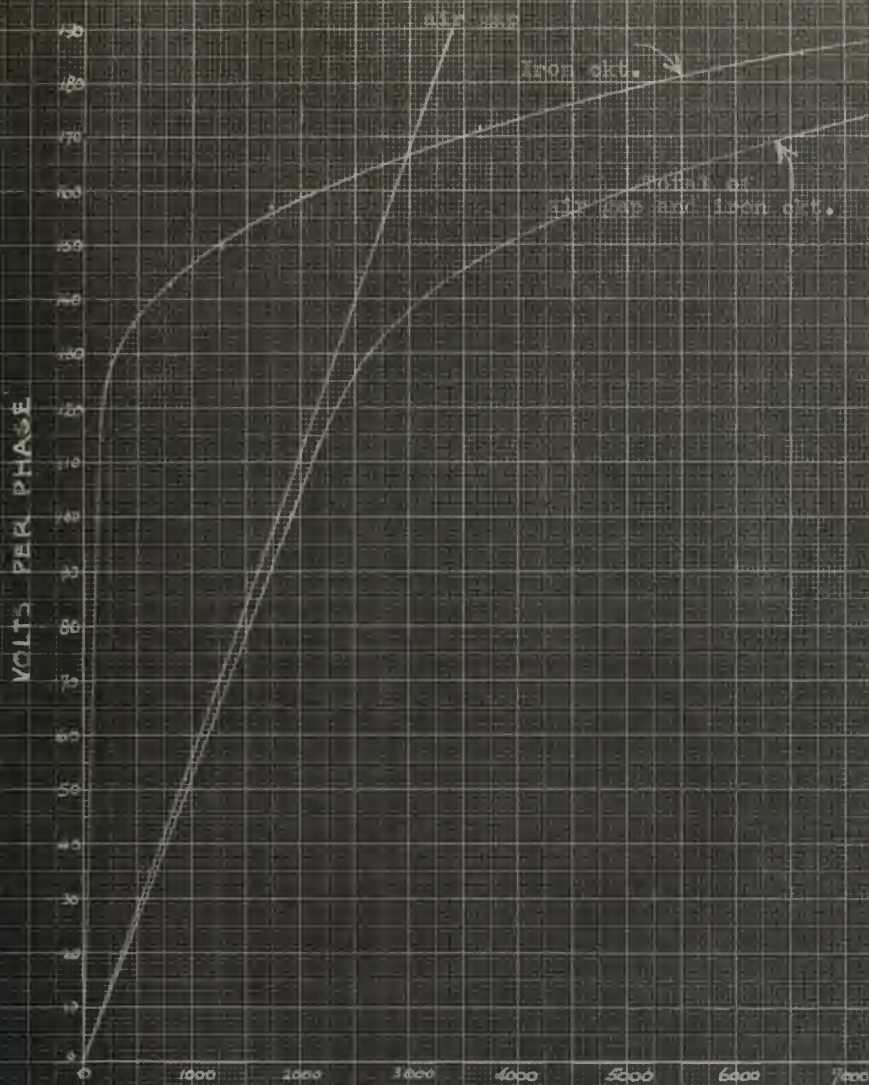


Fig. 8

Armature vector amp. turns for a complete mag. circuit = $.71 \Delta \lambda_p =$
 Approx. total equiv. arm. amp. turns including effect of leakage drop
 $= k' A =$

Where $k' =$

Approx. percent drop due to equiv. arm. res. = $I_a r_e \div E = 1.5 q_{ac} =$

Approx. saturation factor at full load =

Desired regulation =

$F \div R' = f_s (q - q_{re}) + 1 =$

Approx. full load field ampere turns = $a A' \div \sqrt{a^2 - 1} =$

Reluctance ampere turns = $R' \sqrt{1 + q_s^2} = \frac{F'}{a} \sqrt{1 + q_s^2} =$

Amp. turns in iron at full load, (from saturation curve) =

Amp. turns in single air gap at full load = $(R - N_{i_t}) \div 2 =$

Assume air gap contraction coefficient for slots and ducts = $.75 \frac{l_g}{l_g + l_d}$

Approx. air gap for calculation of fringing = $0.75 N_{i_g} \div 0.313 B_g =$

Tooth fringing constant* = $0.6 + 1.47 \log_{10} \frac{w_g}{2\delta} =$

Effective pole arc = $(l_p + 2\delta)(w_H + 2\delta f_t) \div \lambda_t =$

Duct fringing constant* = $0.6 + 1.47 \log_{10} \frac{w_d}{2\delta} =$

Effective length of arm. core = $l + \delta - N_d (w_d - 2\delta f_d) =$

Effective gap section = $l_g l_{pe} =$

Corresponding gap density at full load =

Min. safe air gap = $N_{i_g} \div 0.313 B_{pe} =$

A	3840	= 0.71 x	1183 x 4.73
A'	4608	= 1.2 x	3840
k'	1.2	20% leakage drop assumed	
q _{re}	0.01875	= 1.5 x	0.0125
f _s			
q			
a			
F'			
R			
N _{i_t}	790		
N _{i_g}	2540		
	1.00		
f _t	0.25	= 2540 ÷ 0.313 x 3224.5	
l _{pe}	0.75	= 0.6 + 1.47 log ₁₀ $\frac{5}{1.5}$	
f _d	4.03	= (4.73 + 1.5)(0.395 + 5 x 0.625) ÷ 0.79	
l _e	0.60	= 0.6 + 1.47 log ₁₀ $\frac{5}{1.376}$	
l _e	5.3	= 4.7 + 2.5 - 1(1.5 - 0.5 x 1.7825)	
s _{pe}	21.37		
B _{pe}	33500		
Δ	0.242	= 2540 ÷ 0.313 x 33500	

Draw air gap line on same sheet with total iron magnetization curve, and add the two to get the total saturation curve. See Fig. 8

* For values of $\frac{w}{2\delta} < 1$, $f = (1 - 0.4 \frac{w}{2\delta}) \frac{w}{2\delta}$.

Slot Leakage

Flux per ampere inch of slot $= 3.2 \left(\frac{1}{3} \frac{d_1}{W_3} + \frac{d_2}{W_3} + \frac{2d_3}{W_3 + W_4} + \frac{d_4}{W_4} \right) + 1.1 = \phi_s'$

Slot width divided by tooth pitch $= b_s''$

Slot constant $= \lambda_s \phi_s' = \frac{d_s}{b_s''} \times (1.2 \text{ to } 3.)^*$

Slot pitch factor, k_{ps}

Slot leakage volts in terms of $E_a = 2\pi k_{ps} \Delta \cdot 10^{-8} \div e'' = q_{zs}$

Tooth-Tip Leakage

Flux per ampere inch of slot ϕ_{tt}'

Slots per pole N_{sp}

Tooth-tip constant $= 4.4 \phi_{tt}' \div N_{sp} = (1.2 \text{ to } 2.5)$

Tooth-tip leakage volts in terms of $E_a = k_{tt} \frac{\Delta b_{tt}}{B_p k_{pc}} = 8.6 k_{tt} \frac{\Delta v k_{pc}}{10^8 e''} = q_{zt}$

Coil End Leakage

Flux per ampere inch of end belt ϕ_e'

Ratio free length to active length $= \frac{1}{k_e} - 1 = k_{fa}$

Coil end pitch factor, k_{pc}

Coil-end leakage volts in terms of $E_a = 12.6 \phi_e' k_{fa} \Delta v 10^{-8} \div e'' = q_{ze}$

Total percent Leakage Volts $= q_{zs} + q_{zt} + q_{ze} = q_z$

See pp. 66

REGULATION AND EXCITATION

Non-Inductive Load

Total induced volts $= E \sqrt{(1 + q_{zs})^2 + q_z^2} = E_a$

Corresponding ampere turns from saturation curve R

Arm. vector ampere turns at full load A

Total field ampere turns for noninductive load F_n

Corresponding no load volts E_F

Regulation $= (E_F - E) \div E = q$

For complete
magnetic
circuit

If this differs much from the specified regulation the air gap or the saturation must be altered and calculations repeated.

Inductive Load of power factor =

$$(1) A = \sqrt{2} \times 3 \times \frac{1}{2} \times \frac{4}{\pi} \times k_p \times l_b \times S \times N \times I_{RMS}$$

$$= \sqrt{2} \times 1.5 \times \frac{4}{\pi} \times .966 \times .966 \times 2 \times 2 \times 225.5$$

$$= 2275 \text{ NI}$$

E_a
 R
 A
 F_t
 E_F
 q

142.5
3200
2275 (1)
4825
160.0
1545

Draw vector diagram to scale for each of these cases and plot an excitation characteristic for each. See Fig. 9

* Low values for open slots and high values for nearly closed slots.

NON-INDUCTIVE LOAD

$$R + A = F$$

$$5125 + 2275 = 3850 \text{ NI}$$

EMF
 E_T/ϕ

$$5200 + 2270 = 4825 \text{ NI}$$

.8 PF INDUCTIVE LOAD

FIG. 9

Exciting e.m.f. <i>Field supply circuit must be designed to give</i> $E_s =$	120		
Volts allowed for field rheostat = 10% to 15% of $E_s =$ <i>assume</i> $16.7\% E_s$	20		
Volts per coil = $(E_s - E_r) \div 2p =$	E_s' 5	$= (120 - 20) \div 20$	
Depth of winding space = <i>assumed</i>	D_s 0.75	$+$	
Mean length of one turn in inches <i>assuming</i> $k = 0.65$ <i>and</i> ρ <i>section</i> $l_s'' =$ $= \frac{1}{3} \times 1.5$	11.36		
Section in cir. mils = $(N_s = F_t \div 2) l_s'' \div E_s' =$ c.m.s.	5500	$= \frac{4825}{2} \times 11.36 \div 5$	
Dimensions of wire or conductor:	0.084	O.D.,	D.C.C. No. 13 AWG
Watts per square inch of total coil surface per deg. cent. =	H_f 0.0135	P.	302 STILL
Allowable temp. rise of coil surface =	T_f 50-60		
Cir. mils per amp. in field coil = $500 \sqrt{D_s \div H_f T_f} =$	\odot_s 527	$= 500 \sqrt{0.75 \div 0.0135 \times 50}$	(or 60)
Ampere field = c.m.s. $\div \odot_s =$	I_s 10.5 MAX 9.8 MIN		
Turns per spool = $N_s \div I_s =$	N_s 246 MAX 230 MIN		
Arrangement of conductors, sketch. See Fig 10	8x30		

THERMAL CALCULATIONS

Armature

Total iron loss

 P_i

1700

Copper loss at 60° cent.

 P_{ac}

1200

Total loss

 P_a

2900

Peripheral radiating surface including coil ends

 S_a

3750

Watts per sq. in. of radiating surface $= P_a \div S_a =$ P_a''

0.755

Watts radiated per sq. in. per deg. cent. =

 H_a

0.018

average

Temperature rise in deg's. cent. $= P_a'' \div H_a =$ T_a

43°C

Field Spool

Copper loss per spool

 P_s'

55

 $= 10.5 \text{ amperes} \times 5 \text{ volts}$

Total coil surface per spool

 S_s' 76 in² $= \text{outer turns} + \text{ends}$ Watts per sq. in. of surface $P_s' \div S_s' =$ P_s''

0.725

Watts radiated per sq. in. per deg. cent.

 H_f

0.0135

P203 STILL

Temperature rise in deg's. cent $= P_s'' \div H_f =$ T_f

53°C

 $= \frac{0.725}{0.0135}$

1915	1916	1917	1918	1919	1920	1921	1922	1923	1924	1925	1926	1927	1928	1929	1930	1931	1932	1933	1934	1935	1936	1937	1938	1939	1940	1941	1942	1943	1944	1945	1946	1947	1948	1949	1950	1951	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2443	2444	2445	2446	2447	2448	2449	2450	2451	2452	2453	2454	2455	2456	2457	2458	2459	2460	2461	2462	2463	2464	2465	2466	2467	2468	2469	2470	2471	2472	2473	2474	2475	2476	2477	2478	2479	2480	2481	2482	2483	2484	2485	2486	2487	2488	2489	2490	2491	2492	2493	2494	2495	2496	2497	2498	2499	2500	2501	2502	2503	2504	2505	2506	2507	2508	2509	2510	2511	2512	2513	2514	2515	2516	2517	2518	2519	2520	2521	2522	2523	2524	2525	2526	2527	2528	2529	2530	2531	2532	2533	2534	2535	2536	2537	2538	2539	2540	2541	2542	2543	2544	2545	2546	2547	2548	2549	2550	2551	2552	2553	2554	2555	2556	2557	2558	2559	2560	2561	2562	2563	2564	2565	2566	2567	2568	2569	2570	2571	2572	2573	2574	2575	2576	2577	2578	2579	2580	2581	2582	2583	2584	2585	2586	2587	2588	2589	2590	2591	2592	2593	2594	2595	2596	2597	2598	2599	2600	2601	2602	2603	2604	2605	2606	2607	2608	2609	2610	2611	2612	2613	2614	2615	2616	2617	2618	2619	2620	2621	2622	2623	2624	2625	2626	2627	2628	2629	2630	2631	2632	2633	2634	2635	2636	2637	2638	2639	2640	2641	2642	2643	2644	2645	2646	2647	2648	2649	2650	2651	2652	2653	2654	2655	2656	2657	2658	2659	2660	2661	2662	2663	2664	2665	2666	2667	2668	2669	2670	2671	2672	2673	2674	2675	2676	2677	2678	2679	2680	2681	2682	2683	2684	2685	2686	2687	2688	2689	2690	2691	2692	2693	2694	2695	2696	2697	2698	2699	2700	2701	2702	2703	2704	2705	2706	2707	2708	2709	2710	2711	2712	2713	2714	2715	2716	2717	2718	2719	2720	2721	2722	2723	2724	2725	2726	2727	2728	2729	2730	2731	2732	2733	2734	2735	2736	2737	2738	2739	2740	2741	2742	2743	2744	2745	2746	2747	2748	2749	2750	2751	2752	2753	2754	2755	2756	2757	2758	2759	2760	2761	2762	2763	2764	2765	2766	2767	2768	2769	2770	2771	2772	2773	2774	2775	2776	2777	2778	2779	2780	2781	2782	2783	2784	2785	2786	2787	2788	2789	2790	2791	2792	2793	2794	2795	2796	2797	2798	2799	2800	2801	2802	2803	2804	2805	2806	2807	2808	2809	2810	2811	2812	2813	2814	2815	2816	2817	2818	2819	2820	2821	2822	2823	2824	2825	2826	2827	2828	2829	2830	2831	2832	2833	2834	2835	2836	2837	2838	2839	2840	2841	2842	2843	2844	2845	2846	2847	2848	2849	2850	2851	2852	2853	2854	2855	2856	2857	2858	2859	2860	2861	2862	2863	2864	2865	2866	2867	2868	2869	2870	2871	2872	2873	2874	2875	2876	2877	2878	2879	2880	2881	2882	2883	2884	2885	2886	2887	2888	2889	2890	2891	2892	2893	2894	2895	2896	2897	2898	2899	2900	2901	2902	2903	2904	2905	2906	2907	2908	2909	2910	2911	2912	2913	2914	2915	2916	2917	2918	2919	2920	2921	2922	2923	2924	2925	2926	2927	2928	2929	2930	2931	2932	2933	2934	2935	2936	2937	2938	2939	2940	2941	2942	2943	2944	2945	2946	2947	2948	2949	2950	2951	2952	2953	2954	2955	2956	2957	2958	2959	2960	2961	2962	2963	2964	2965	2966	2967	2968	2969	2970	2971	2972	2973	2974	2975	2976	2977	2978	2979	2980	2981	2982	2983	2984	2985	2986	2987	2988	2989	2990	2991	2992	2993	2994	2995	2996	2997	2998	2999	3000	3001	3002	3003	3004	3005	3006	3007	3008	3009	3010	3011	3012	3013	3014	3015	3016	3017	3018	3019	3020	3021	3022	3023	3024	3025	3026	3027	3028	3029	3030	3031	3032	3033	3034	3035	3036	3037	3038	3039	3040	3041	3042	3043	3044	3045	3046	3047	3048	3049	3050	3051	3052	3053	3054	3055	3056	3057	3058	3059	3060	3061	3062	3063	3064	3065	3066	3067	3068	3069	3070	3071	3072	3073	3074	3075	3076	3077	3078	3079	3080	3081	3082	3083	3084	3085	3086	3087	3088	3089	3090	3091	3092	3093	3094	3095	3096	3097	3098	3099	3100	3101	3102	3103	3104	3105	3106	3107	3108	3109	3110	3111	3112	3113	3114	3115	3116	3117	3118	3119	3120	3121	3122	3123	3124	3125	3126	3127	3128	3129	3130	3131	3132	3133	3134	3135	3136	3137	3138	3139	3140	3141	3142	3143	3144	3145	3146	3147	3148	3149	3150	3151	3152	3153	3154	3155	3156	3157	3158	3159	3160	3161	3162	3163	3164	3165	3166	3167	3168	3169	3170	3171	3172	3173	3174	3175	3176	3177	3178	3179	3180	3181	3182	3183	3184	3185	3186	3187	3188	3189	3190	3191	3192	3193	3194	3195	3196	3197	3198	3199	3200	3201	3202	3203	3204	3205	3206	3207	3208	3209	3210	3211	3212	3213	3214	3215	3216	3217	3218	3219	3220	3221	3222	3223	3224	3225	3226	3227	3228	3229	3230	3231	3232	3233	3234	3235	3236	3237	3238	3239	3240	3241	3242	3243	3244	3245	3246	3247	3248	3249	3250	3251	3252	3253	3254	3255	3256	3257	3258	3259	3260	3261	3262	3263	3264	3265	3266	3267	3268	3269	3270	3271	3272	3273	3274	3275	3276	3277</
------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	--------

Field Pole Sections



End View



Side View

FIG. 10


Load in percent of full load		25	50	75	100	125
Armature current per phase	I_a	56.4	112.75	169.15	225.50	281.90
Output (watts)	P_o	18750	37500	56250	75000	93750
Fixed Losses = Core + Friction + Field Copper =	P_F	4200				
Armature Copper Loss	P_{ac}	80	320	715	1275	1990
Input = $P_o + P_F + P_{ac}$	P_I	23130	42120	61265	80575	100040
Efficiency = $P_o \div P_I =$	%	81.00	89.00	91.80	93.00	93.75

Plot Efficiency Curve. See Fig. 11

WEIGHTS AND COSTS

	Weight Lbs.	Cost, Dollars		Weight Lbs.	Cost, Dollars	
		Per lb.	Total		Per lb.	Total
Copper						
Armature $3 \times \frac{1785}{3} \times \frac{653 \text{ lb}}{1000 \text{ ft}} = 385 \pm$	300					
Field $20 \times 357.6 \times \frac{15.7 \text{ lb}}{1000 \text{ ft}} = 120 \pm$	150					
Total	450					
Per K. W.	0.167					
Magnetic Iron						
Arm. Laminations $0.28 \frac{\text{lb}}{\text{in}^2} \times (1830 + 211) = 600$	650					
Magnet Cores } $0.28 \times 20 \times 14.74 = 96$	75					
Pole Faces } $0.28 \times 20 \times 14.74 = 96$	35					
Yoke $0.28 \times 18 \times 4.7 \times 1.0 = 100$	100					
Total	860					
Per K. W.	0.0875					
Total Active Material						
Total	1310					
Per K. W.	0.0573					

Phase terminal volts; Efficiency; Line amperes -
versus Percent Load

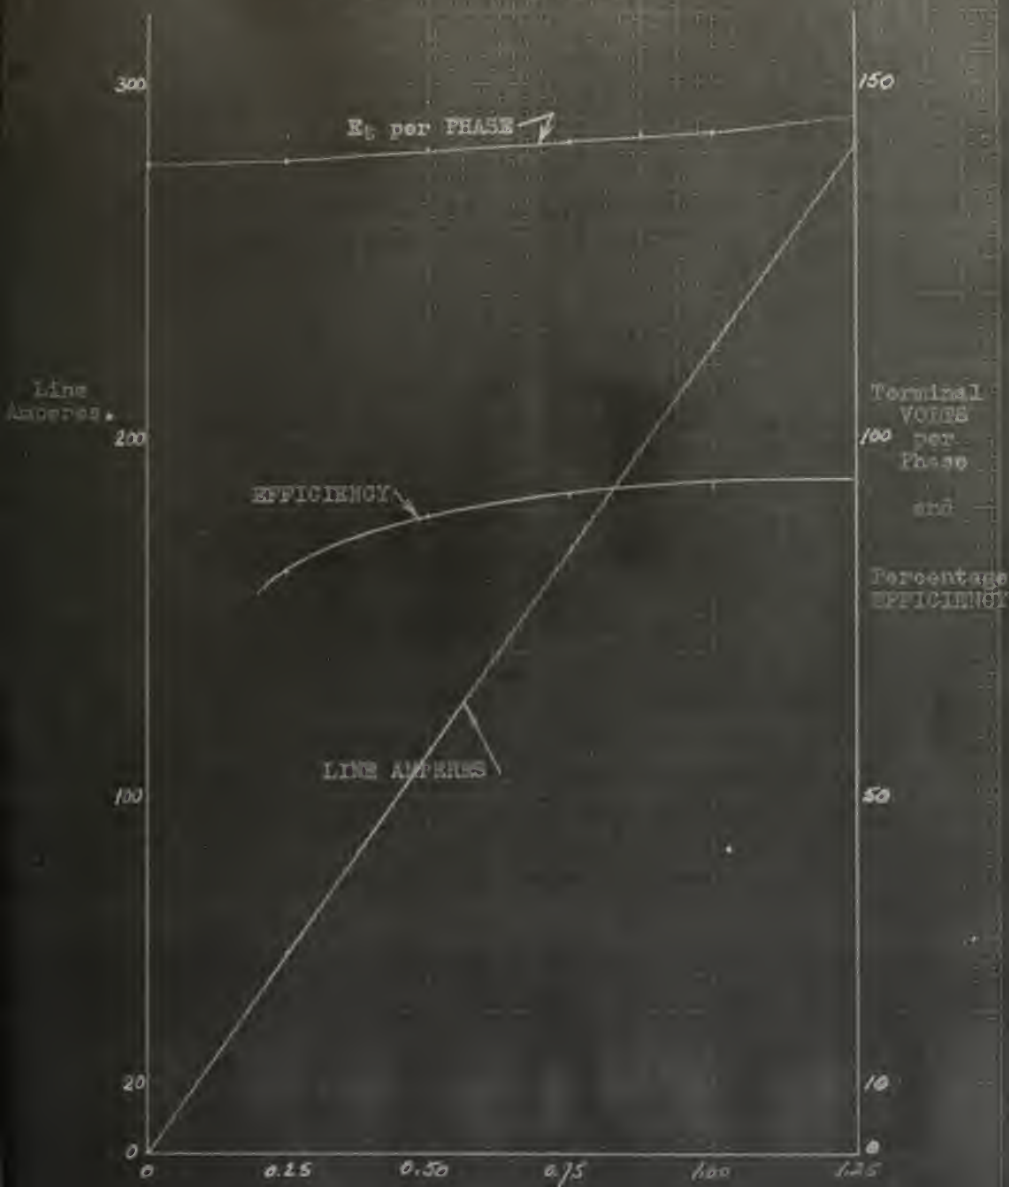

OUTPUT LOAD

Fig 11

(61)

CALCULATION NOTES

The first page of calculations require but one detailed explanation, that of the velocity calculation for the peripheral velocity of the armature at its inner radius. We consulted the author of the sheets, Professor C. V. O. Terwilliger and accept his notation at the bottom of the sheet as suitable for our calculation if we, on assuming a ratio l_p to 1, or k_3 equal to unity, make the constant before the root factor equal to the value 124, as suggested. This we did with the results noted. The specific output of our machine is a measure of the volt ampere capacity using for a measuring guide the surface area of the inner face of the armature. It is volt-amperes per square area measure. The remaining items are straight forward arithmetic.

The first item on page two of the notes is the choosing of the number of conductors per slot having approximated this value with the upper few manipulations. We, it is noted, have approximated 4.18 conductors per slot. This is impossible, and if we were to choose the number of conductors to be five, then a winding problem which would add to the complexity of the machine would result. We choose the number of conductors to be four per slot, and it proved later on this page to be satisfactory, when calculations for both the flux entering the armature per pole at full load entry and the peripheral current density entry gave results conforming with reference values for similar situations.

The insulation selections for the armature conductors has

been discussed earlier in this paper. The curves which helped determine the wire enamel thickness are taken from tabulated values of wire diameters over enamel from various wire tables found in the references. The curves appear on Figure 12. The actual data was finally taken from the GE INSULATING MATERIALS catalog of December, 1948, listed in the bibliography. The winding diagram appears as Figures 1 and 15, and the slot section to scale appears as Figure 6.

Page three of the calculations contains no startling exposure of facts that require lengthy explanation. It is a development of the armature losses, divided into core losses, tooth losses, and copper losses. The core losses have already been discussed earlier in this paper. The tooth losses follow along the same line of reasoning as the core losses. The copper losses are straight forward I^2R losses.

On page four there are several items which should be developed. First, the item of armature heating resolves in picking an empirical value for the watts dissipated per square inch of armature core area per degree Centigrade rise due to the losses found on page three. The various references select from the previous experiences of their several authors, somewhat similar magnitudes for these critical values. The better presentation of the solution appeared in those texts which segregated the value of the watts dissipated dependent upon the types of surfaces from which the losses were to be dissipated. I selected the case where the reference written by Miles Walker chose the value for the copper surfaces proper and for laminated iron surfaces. They appear in the second

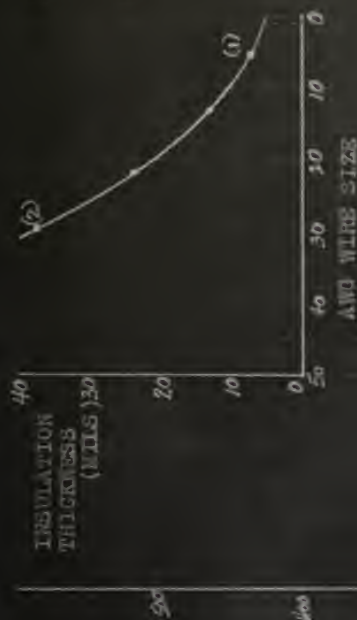


FIG 12
(64)

For 0000 AWG
DIAMETER OVER INSULATION
= 0.470 INS.

CALCULATIONS FOR WIRE STRAP THICKNESS TO
DETERMINE SLOT DIMENSIONS AND WIRE SIZE
FOR ARMATURE CONDUCTORS.





- item on the page four of the calculations and give rise to satisfactory results as far as our preliminary estimates and specification limitations on temperature rise due to losses were concerned.

The magnetic circuit appears as a part of the not-to-scale sketch of Figure 7. The circuit is used along with the "flux versus ampere-turns" curves for the various members of the magnetic circuit in the calculations for the number of ampere-turns for the various load voltages per phase of the generator. These values are calculated and curves made as appear in Figure 8. The tabulated calculations appear on page four of the calculations. The value of the "air-gap" ampere turns in each case are found by applying the formula furnished by the curve sheet author. This formula agrees with those of both SLICHTER and WALKER in their references to this calculation. The exact form of the formula differs in each case, and therefore, it becomes a matter of using the one thought best for this situation.

On the next page there appear a series of calculations which set the value for the minimum safe air gap required for the design. It is based upon calculations determining the air gap density, tooth fringing coefficient, ventilating duct fringing effect, all based upon the ampere-turns in the air gap and iron magnetic circuit at full load. Our calculations show 0.242 inches to be a minimum safe air gap. We are using a value of 0.25 inches, which value was based upon an estimation of STILL in his reference on the subject.

Leakage reactance calculations are based on formulae developed by Professor C. V. O. Terwilliger. They Are:

1. For the slot reactance

$$X_{\text{slot}} = 2 \left(\frac{2\pi f}{10^8} \right) \left(\frac{3.2 N^2}{W_s} \right) \left(\frac{8}{3} d_1 + d_2 + 4 d_3 + \frac{4}{3} W_s \right) \cdot l_{\text{eff}} \times S \times k_{ps}$$

where \bar{X} = reactance

$$\pi = 3.1416$$

f = frequency

N = turns per slot coil

l_{eff} = mean effective length of conductors

S = No. of slots per pole per phase

k_{ps} = pitch to slot ratio factor = $\frac{0.1 + 2 \times .866}{2 \times 1} = 0.866$

2. For the tooth tip reactance:

$$X_{\text{TOOTH TIP}} = 2 \times \left(\frac{2\pi f}{10^8} \right) \frac{3.2 \times 4 \times N^2 \times \delta}{\left(\frac{\lambda_t}{2} + \frac{\pi W_s}{4} \right)} \times l_{\text{eff}} \times S \times k_{ps}$$

where δ = air gap

λ_t = tooth pitch


W_s = width slot

3. For the coil end leakage (external of slot)

$$X_{\text{COIL ENDS}} = 2 \times \left(\frac{2\pi f}{10^8} \right) (4Y) \left[\frac{3.2 N^2 S^2}{8\pi} + \frac{1.84}{\pi} S^2 N^2 l_g \frac{Y}{r} \right]$$

where Y = length $\frac{1}{2}$ external coil

r = radius of phase belt flux path

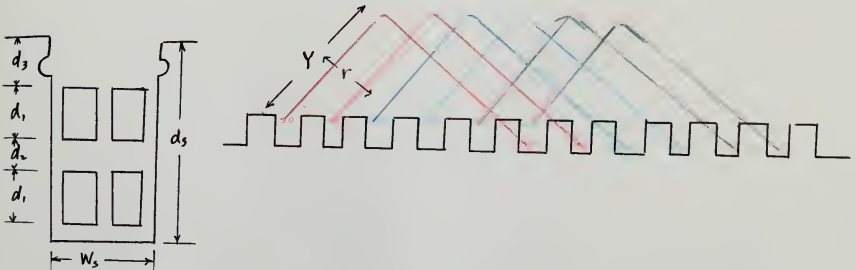

THE UNIVERSITY OF CHICAGO
LIBRARY

100 EAST 57TH STREET
CHICAGO, ILL. 60637

DATE _____
BY _____

RECEIVED _____
FROM _____

AMOUNT _____
CURRENCY _____

NAME _____
ADDRESS _____

CITY _____
STATE _____

ZIP _____
COUNTRY _____

TELEPHONE _____
FAX _____

EMAIL _____
WEB _____

Following the formula and procedure at the lower half of page six, and graphically solving for the total field ampere turns at full KVA load as indicated in Figure 9, we arrive at values for the regulation of our machine at a non-inductive load and an 0.80 power factor load. The calculated values are in line with expected values as indicated in the references. To arrive at final regulation, we shall have to resort to the close regulation as described in the chapter on regulation and field excitation.

Field coil calculations follow along the classic lines of determining and arithmetically working out the values of ampere turns required by the field circuit to generate the output voltage, pre-selecting a field voltage, and then knowing the general dimensions of your individual field pole core, selecting the size wire and length required, thereby determining the number of field turns, and then selecting the arrangement whereby they will be fitted to their allotted space. Checks such as appear on this page guide the calculator.

Field circuit thermal calculations then are worked out and combined with the armature thermal calculations previously determined. The two then determine the overall thermal picture.

Finally, efficiency calculations are carried out utilizing the data of Figures 13 and 14. Weights and costs of armature iron and copper are then determined to give a general overall picture of the machine on paper.

To round out the design, certain mechanical calculations are made as follows:

FRICTION AND WINDAGE LOSS
VS.
GENERATOR RATING

REFERENCE
CURVE A - SLICHTER
B - STILL


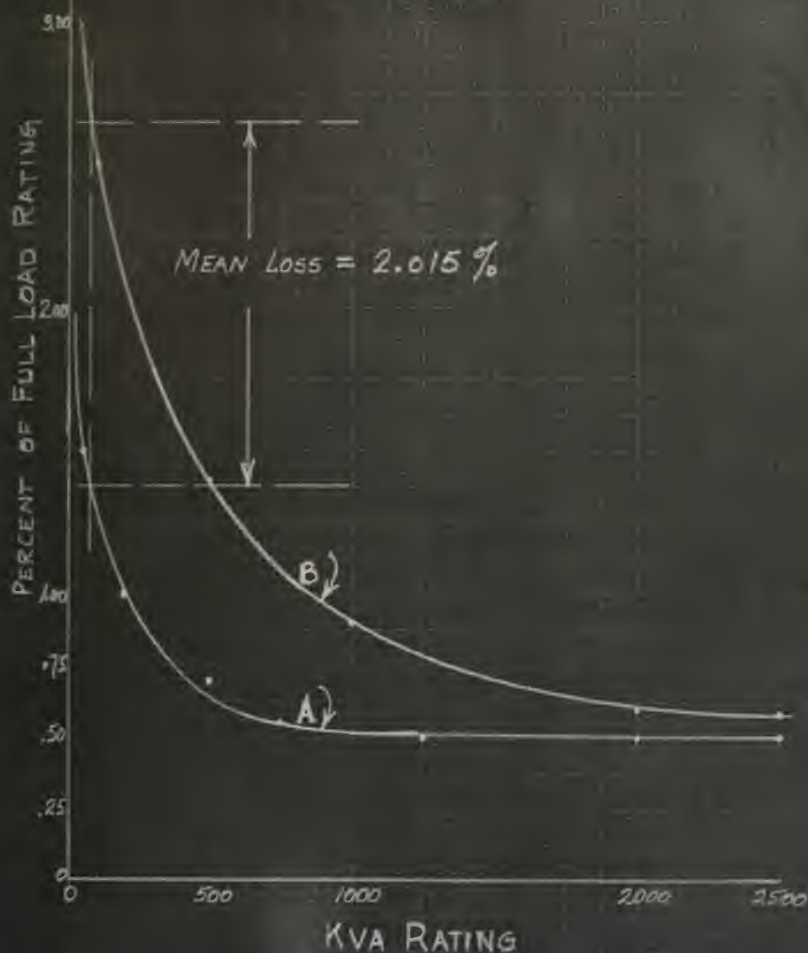


FIG. 13

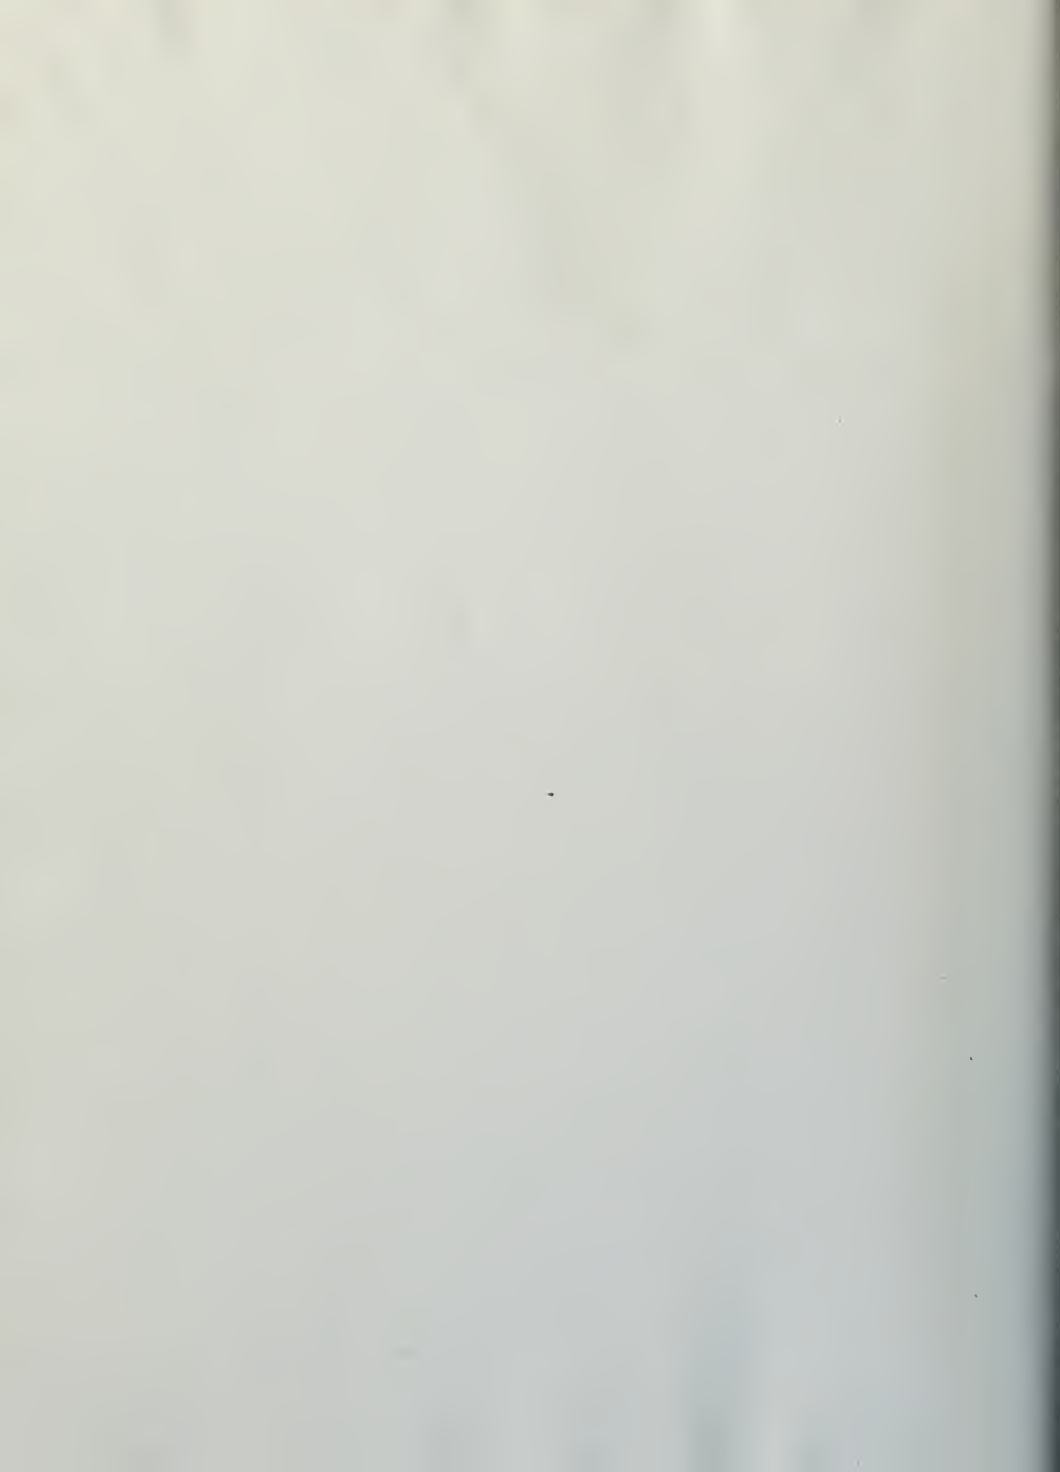

TERMINAL VOLTS PER PHASE
 VS.
 % OF GENERATOR LOADS
 AT
 0.80 POWER FACTOR

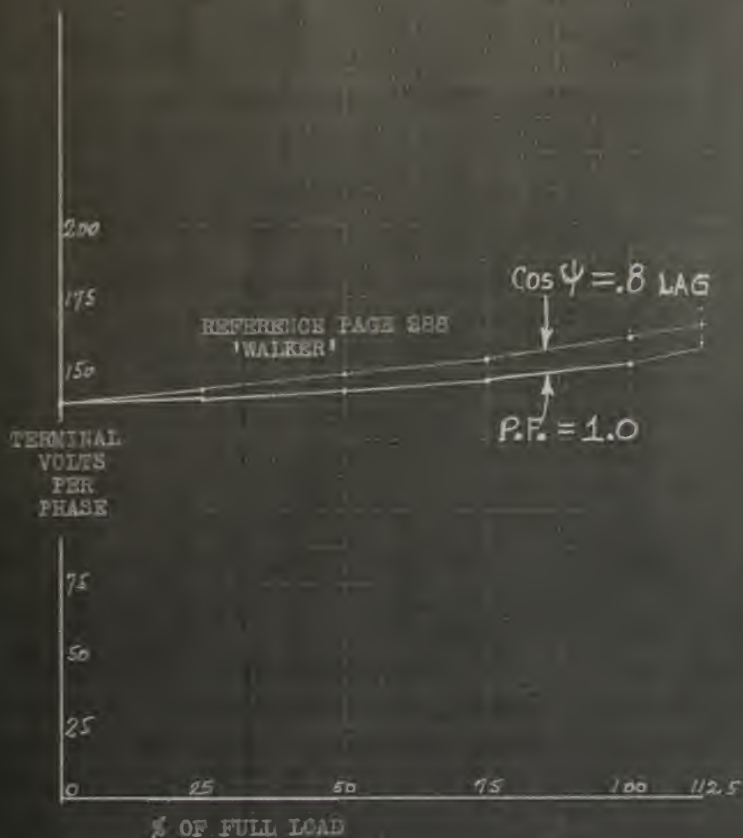


FIG. 14



1. The average force tending to displace the coils in

$$\begin{aligned} \text{a slot} \quad F_s &= \frac{T \ell I B_{\max}}{2 \times 10 \times 444,800} \\ &= \frac{2 \times (4.7 \times 2.54) \times (225.5 \times 1.25) \times 118,200}{8,896,000} \end{aligned}$$

$$= 91 \text{ pounds}$$

where T is the number of turns per coil side,

ℓ is the length of the wire in cms.,

I is the current in the wire in amperes,

B_{\max} is the density of magnetic field,

10 is a conversion factor for amperes to absolute units

and 444,800 is the number of dynes per pound force.

2. The diameter of the rotor shaft = D_r =

$$= \sqrt[3]{\frac{\text{watts, full load}}{\text{r.p.m. of machine}}} \times (0.84)^{\frac{2}{3}}$$

$$= 0.84 \times 5.920$$

$$= 4.97 \text{ inches, and we shall use 5.00 inches}$$

3. From Page 560 in STILL, the journal diameter needs

be but 40% the shaft diameter, or 2.00 inches, and the journal length about $2\text{-}3/4 \times D_r$, the shaft diameter. Our bearing loading will be less than these dimensions can sustain. Therefore, we shall pick a single row, radial thrust bearing of 2.00 inch diameter, and, as indicated in the S.A.E. standards for radial and angular ball and roller bearings, the width of this bearing will be approximately 1.25 inches. It will have a radial capacity of approximately 2500 psi and a thrust capacity of one half that figure, adequate for our situation.

4. The centrifugal force exerted on the field pole bolts equals $F_c = 0.000341 \times W \times R \times (\text{RPM})^2$ psi

$$= 0.000341 \times 20 \times 1 \times (360)^2$$

$$= 880 \text{ psi}$$

where W is the weight, in pounds, per pole,
 R is the radius in feet, to the pole base,
 and RPM is the revolutions per minute of the pole about the machine axis.

Since each mild steel bolt can withstand 15,000 psi tensile stress, we can limit our tie down bolts to one in number for each pole. They shall have to be rust resistant either as a result of coating or material, and shall have to be of a material close to the silicon steel of the pole pieces in the electromotive series to reduce any galvanic action between the surfaces of contact.

5. The mechanical stress at the root of the pole piece is a summation of the centrifugal force exerted on the pole piece and the distortion force acting on the pole. The former we have calculated to be 880 psi. The distortion force

equals $F_d = \frac{B^2 A}{8 \pi}$ dynes or $\frac{B^2}{72 \times 10^6}$ psi

$$= \frac{[38000 \times 2.54]^2}{72 \times 10^6}$$

$$= 840 \text{ psi}$$

Vector summation of these two forces results in a force at the pole root of approximately $880 \times (2)^{\frac{1}{2}}$ or 1250 psi. The pole material is capable of withstanding a bending stress of approximately 16,000 psi, and so there is an adequate safety factor involved in this instance.

Subscription price, Five Dollars per Annum in Advance.
Single Copies, Fifteen Cents.

Vol. 27

Published by the American Medical Association, 535 North Dearborn Street, Chicago, Ill.

Entered as Second-Class Matter, May 26, 1882. Postpaid at special rate of \$3.00 per annum authorized by Act of Congress, October 3, 1917.

Acceptance for mailing at special rate of postage provided for in Act of October 3, 1917.

Postpaid outside of United States, \$4.00 per annum in advance.

Copyright, 1919, by American Medical Association.

Printed at the American Medical Association Press, Chicago, Ill.

Second-class postage paid at Chicago, Ill., and at additional mailing offices.

Postmaster: This journal is published weekly, except on Sundays and public holidays.

Subscription orders, notices of change of address, and other communications should be sent to the Editor.

Advertisements should be sent to the Business Manager.

Claims for missing issues will only be considered if made immediately on receipt of succeeding issue.

Not responsible for return of unsolicited manuscripts.

Not responsible for loss of or damage to communications in the mail.

Not responsible for loss of or damage to property in the mail.

Not responsible for loss of or damage to property in the mail.

Not responsible for loss of or damage to property in the mail.

Not responsible for loss of or damage to property in the mail.

Not responsible for loss of or damage to property in the mail.

Not responsible for loss of or damage to property in the mail.

Not responsible for loss of or damage to property in the mail.

Not responsible for loss of or damage to property in the mail.

Not responsible for loss of or damage to property in the mail.

Not responsible for loss of or damage to property in the mail.

6. Fly wheel section, where "fly wheel" means the pole carrying rim, may be determined by calculating the stresses set up in the rim itself and then, knowing the allowable stress of the rim material and utilizing an adequate safety factor, a rim section may be selected. The one known dimension of the rim section is that it should be at least as long axially as the pole it supports.

The force, P, exerted on the rim, is determined by a formula similar to that used for the centrifugal force exerted on the pole pieces themselves, i.e.

$$\begin{aligned} P &= 0.000341 \cdot W \cdot R \cdot (\text{RPM})^2 \\ &= 0.000341 \cdot 100 \times 23/24 \times (360)^2 \\ &= 675 \text{ psi} \end{aligned}$$

The rim material is capable of sustaining a centrifugal force of approximately 15,000 psi, therefore, a section of very small thickness may be employed. The factor of fabricating such a section comes into play at this point, and so a selection of one inch thickness was made for fabricating reasons only, and the factor of safety increases greatly accordingly.

7. The tension in the flywheel due to carrying 20 poles is increased in proportion to the weights of the poles and the revolutions per minute of the system. This tension is easily determined, and is located in the outer rim of the flywheel.

It is:

$$\begin{aligned} P_t &= P + \frac{pP}{2\pi} \text{ psi.} \\ &= 675 \left(1 + \frac{10}{\pi} \right) \\ &= 2820 \text{ psi.} \end{aligned}$$

This figure is still well within the limits of stress allowable and carries with it a factor of safety of greater than five.

8. From FINK, critical speed is the ratio of the empirical constant 200 to the square root of the deflection of the shaft. The deflection of a uniformly loaded shaft depends upon the shaft length, diameter, and mass of the rotor and attached weights it carries.

$$\text{deflection} = \frac{\rho l^3}{48 E J}$$

where E, for steel shafting, is 30×10^6 , and

$$J \text{ is } \frac{1}{2} W r^2$$

$$\text{deflection becomes } 360 \times 20^3 \div 48 \times 30 \times 10^6 \times \pi \times 2.5^2 \times 0.14$$

and equals 0.000116 inches.

Critical speed then becomes $200 \div (0.000116)^{\frac{1}{2}}$, or 18,600 RPM, approximately. This is beyond our wildest imagination, and so we shall not discuss it further.


9. We shall use non-magnetic steel end bells and armature yoke structure steel in order to reduce end coil leakage losses.

and the other two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different.

The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different.

The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different.

The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different. The first two are the same as the first two, but the third is different.

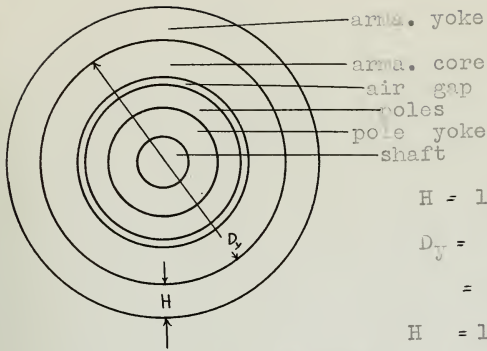


$$H = 1.5 + D_y/12 \text{ inches}$$

$$D_y = 30.15 + 2 \times 2.162 + 2 \times 4.0 \text{ inches}$$

$$= 42.5 \text{ inches}$$

$$H = 1.5 + 42.5/12 = 5 \text{ inches}$$

Therefore, OD of arma. yoke = 52.5 inches, approx.

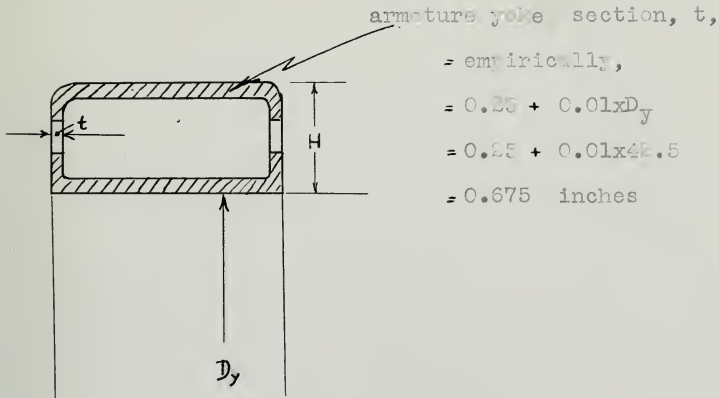

= empirically,

$$= 0.25 + 0.01 \times D_y$$

$$= 0.25 + 0.01 \times 42.5$$

$$= 0.675 \text{ inches}$$



This completes the more important of the mechanical calculations which determine the overall dimensions and weights of the machine. The minor details, such as selecting the bearing number, the size and type of bolts required, the drill and tap dimensions for fitting the bolts, and other numerous detailing, is beyond the scope of this paper. They are details for the planning section. Figures representing a preliminary set-up for the draftsman and planners are included as Figures 15 and 16.

This completes this paper. We have computed the necessary dimensions for an alternator which will meet the specification. We do not claim that they will work to give the rated output at the power factor but feel confident that there are no arithmetical mistakes and that the assumptions are within all known reason. Tests are the only method which will, in our minds, prove that the machine will operate. This is beyond our province at this time.

Major theory behind the calculations are discussed within the paper. Major calculations are worked out in the Appendix. The illustrations represent the results, and give an idea of the construction and size of various parts of the machine. We hope that this meets the requirement of the specification.

THE UNIVERSITY OF CHICAGO
CHICAGO, ILLINOIS
DEPARTMENT OF THE HISTORY OF ARTS
AND ARCHITECTURE
OFFICE OF THE CURATOR
OF THE MUSEUM OF ARTS
AND ARCHITECTURE
CHICAGO, ILLINOIS

TO THE HONORABLE
THE PRESIDENT OF THE UNIVERSITY
OF CHICAGO
CHICAGO, ILLINOIS
THE UNIVERSITY OF CHICAGO
CHICAGO, ILLINOIS
THE UNIVERSITY OF CHICAGO
CHICAGO, ILLINOIS
THE UNIVERSITY OF CHICAGO
CHICAGO, ILLINOIS

THE UNIVERSITY OF CHICAGO
CHICAGO, ILLINOIS
THE UNIVERSITY OF CHICAGO
CHICAGO, ILLINOIS
THE UNIVERSITY OF CHICAGO
CHICAGO, ILLINOIS
THE UNIVERSITY OF CHICAGO
CHICAGO, ILLINOIS




NOTE: "Auto-Manual Selector Switch" Engages and Stays in Manual Position. (Switch is Reversible)

Revised
6-29-99 R.B.L.



BIBLIOGRAPHY

1. Bryant, J.M. and Johnson, E.W. Alternating Current Machinery. New York. McGraw-Hill. 1935
2. Dawes, C. L. Electrical Engineering. New York. McGraw-Hill. 1934
3. Gray, Alexander. Electrical Machine Design, as revised by P. M. Lincoln. New York. McGraw-Hill. 1926
4. H. M. Hobart. Design of Polyphase Generators and Motors. New York. McGraw-Hill. 1913
5. Say, M. G., and Pink, E. N. The Performance and Design of Alternating Current Machines. London. 1946. Sir Issac Pitman and Sons, Ltd.
6. Slichter, W. I. Principles Underlying the Design of Electrical Machinery. London. 1926. John Wiley
7. Still, Alfred. Elements of Electrical Design. New York. McGraw-Hill. 1932
8. Walker, Miles. Specification and Design of Dynamo-Electric Machinery. London. Longmans, Green and Co. 1925
9. S.A.E. Handbook, 1940. SAE PRESS, New York. 1940
10. Hanft, H. H. and Graybrook, H. W. Power Plants for Railroad Cars. Westinghouse Engineer, Vol. 6: 3(73-76) May, 1946
11. General Electric Catalog. INSULATING MATERIALS, 12-48, No. CDR-38A
12. Ward-Leonard Control Systems, Catalog 4-49, No. 7CSA2
13. U. S. Coast Guard Civil Engineering Division, Washington D.C., Specification 4-B-5, for Stationary Type, Slow Speed, Heavy Duty, Diesel Engine Driven Generator Sets. 8-49.

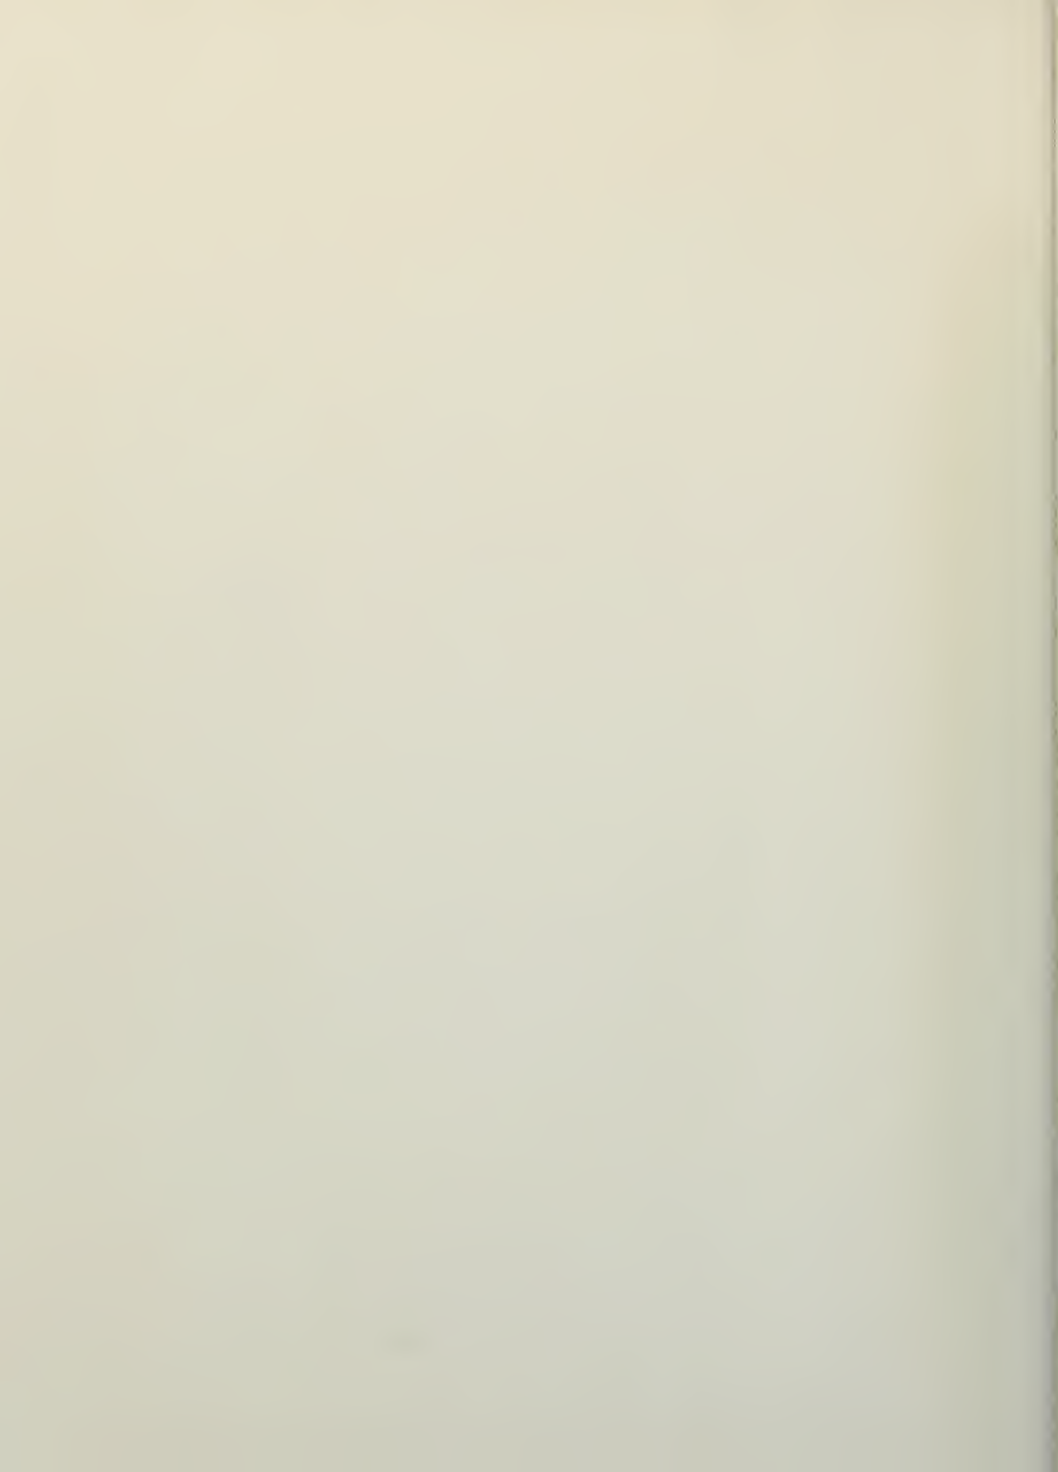

DATE DUE

24 MY '51

Thesis 13114
S27 Scharfenstein
Stationary type slow
speed alternation cur-
rent generator design.

Thesis 13114
S27 Scharfenstein
Stationary type slow
speed alternation cur-
rent generator design.

thesS27

Stationary type slow speed alternating c



3 2768 001 00415 3

DUDLEY KNOX LIBRARY